KV-2212EC
RM-611

Chassis No.SCC-421A-A

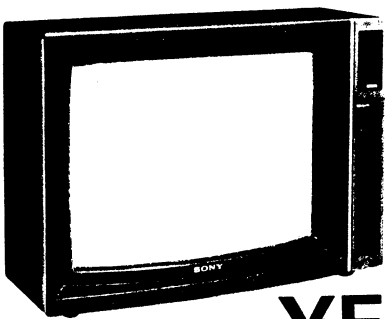

June, 1982

YE-2 CHASSIS

SPECIFICATIONS

Television System:	CCIR system, B, G and H
Color System:	PAL
Channel Coverage:	VHF channels E2-4 (BAND I), E5-12 (BAND III) UHF channels E21-68 (BAND IV/V)
Picture Tube:	Approx. 56 cm (22 inches), 114-degree deflection Trinitron system (approx. 53.8 cm screen measured diagonally)
Antenna:	75-ohm standard antenna socket
Speakers:	Two-way, coaxial type Approx. 5 x 20 cm woofer Approx. 5 cm dia. tweeter
Audio Output:	5 W (with 10 % harmonic distortion)
Input:	MULTI IN connector (8-pin connector)
Outputs:	External speaker terminals (2-pin DIN connectors) for 8-ohm impedance speakers Headphone jack (stereo binaural jack) for 32-ohm impedance headphones
Power Requirements:	220-240 V ac, 50 Hz
Power Consumption:	115 W (Approx. 9.5 W in stand-by condition)
Dimensions:	Approx. 623 x 442 x 410 mm (w/h/d)
Weight:	Approx. 33 kg
Supplied Accessory:	Remote Commander RM-611
Optional Accessories:	Sony OPK-101 stereo adaptor Sony OPK-102 secam decoder Sony OPK-103 teletex decoder

CIRCUIT BOARDS LOCATION

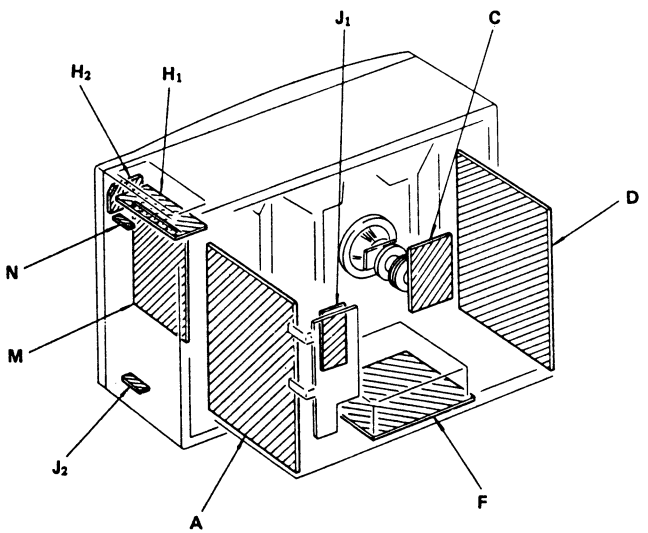

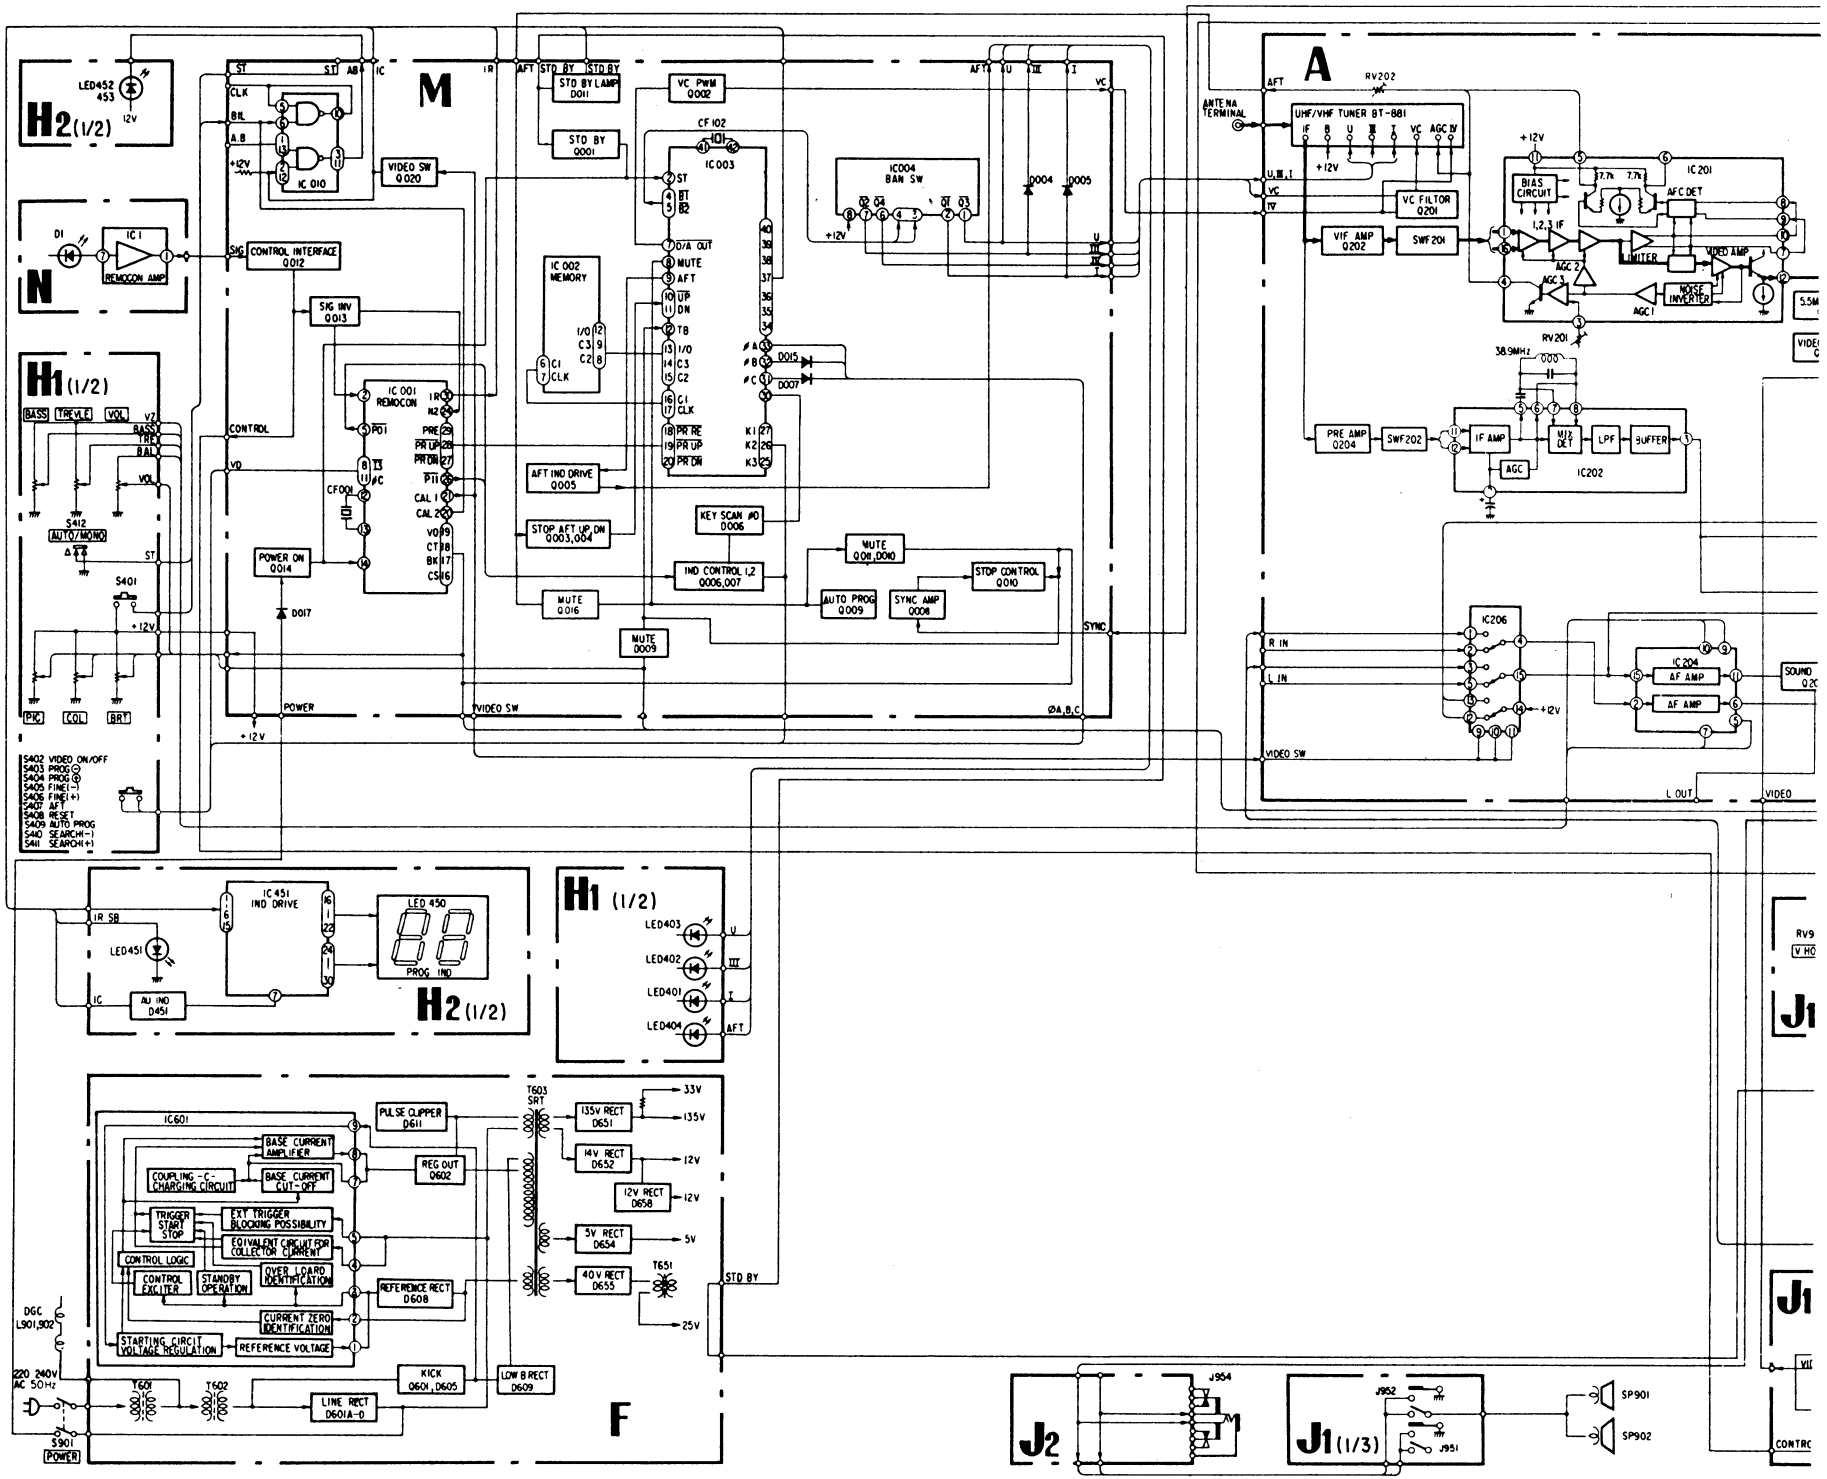
H2 (1/2)
M
N
H1 (1/2)
A
F
J2
J1 (1/3)
LED452
453
12V
IC 010
VIDEO SW Q020
CONTROL INTERFACE Q012
SIG INV Q013
REMOCON AMP
IC 001 REMOCON
IC 002 MEMORY
IC 003
CF 102
STD BY LAMP D011
STD BY Q001
VC PWM Q002
IC004 BAN SW
D004
D005
D015
D007
AFT IND DRIVE Q005
STOP AFT UP,DN Q003,004
KEY SCAN #0 Q006
IND CONTROL 1,2 Q006,007
MUTE Q016
MUTE Q009
MUTE Q008,D010
AUTO PROG Q009
SYNC AMP Q008
STOP CONTROL Q010
POWER ON Q014
D017
S412 AUTO/MONO
S401
S402 VIDEO ON/OFF
S403 PROG ⊖
S404 PROG ⊕
S405 FINE(-)
S406 FINE(+)
S407 AFT
S408 RESET
S409 AUTO PROG
S410 SEARCH(-)
S411 SEARCH(+)
ANTENA TERMINAL
UHF/VHF TUNER BT-881
VC FILTOR Q201
VIF AMP Q202
SWF201
SWF202
PRE AMP Q204
IF AMP
AGC
IC202
IC201
BIAS CIRCUIT
AFC DET
VIDEO AMP
NOISE INVERTER
LIMITER
RV201
RV202
38.9MHz
IC206
IC204
AF AMP
R IN
L IN
L OUT
VIDEO
IC 451 IND DRIVE
LED 450
PROG IND
LED451
AU IND D451
LED403
LED402
LED401
LED404
IC601
PULSE CLIPPER D611
BASE CURRENT AMPLIFIER
COUPLING -C- CHARGING CIRCUIT
BASE CURRENT CUT-OFF
REG OUT Q602
TRIGGER START STOP
EXT TRIGGER BLOCKING POSSIBILITY
EQIVALENT CIRCUIT FOR COLLECTOR CURRENT
CONTROL LOGIC
CONTROL EXCITER
STANDBY OPERATION
OVER LOARD IDENTIFICATION
REFERENCE RECT D608
CURRENT ZERO IDENTIFICATION
STARTING CIRCIT VOLTAGE REGULATION
REFERENCE VOLTAGE
KICK D601, D605
LOW B RECT D609
LINE RECT D601A-D
T603 SRT
135V RECT D651
14V RECT D652
12V RECT D658
5V RECT D654
40V RECT D655
T651
33V
135V
12V
12V
5V
25V
STD BY
DGC L901,902
220 240V AC 50Hz
T601
T602
S901 POWER
J954
J952
J951
SP901
SP902

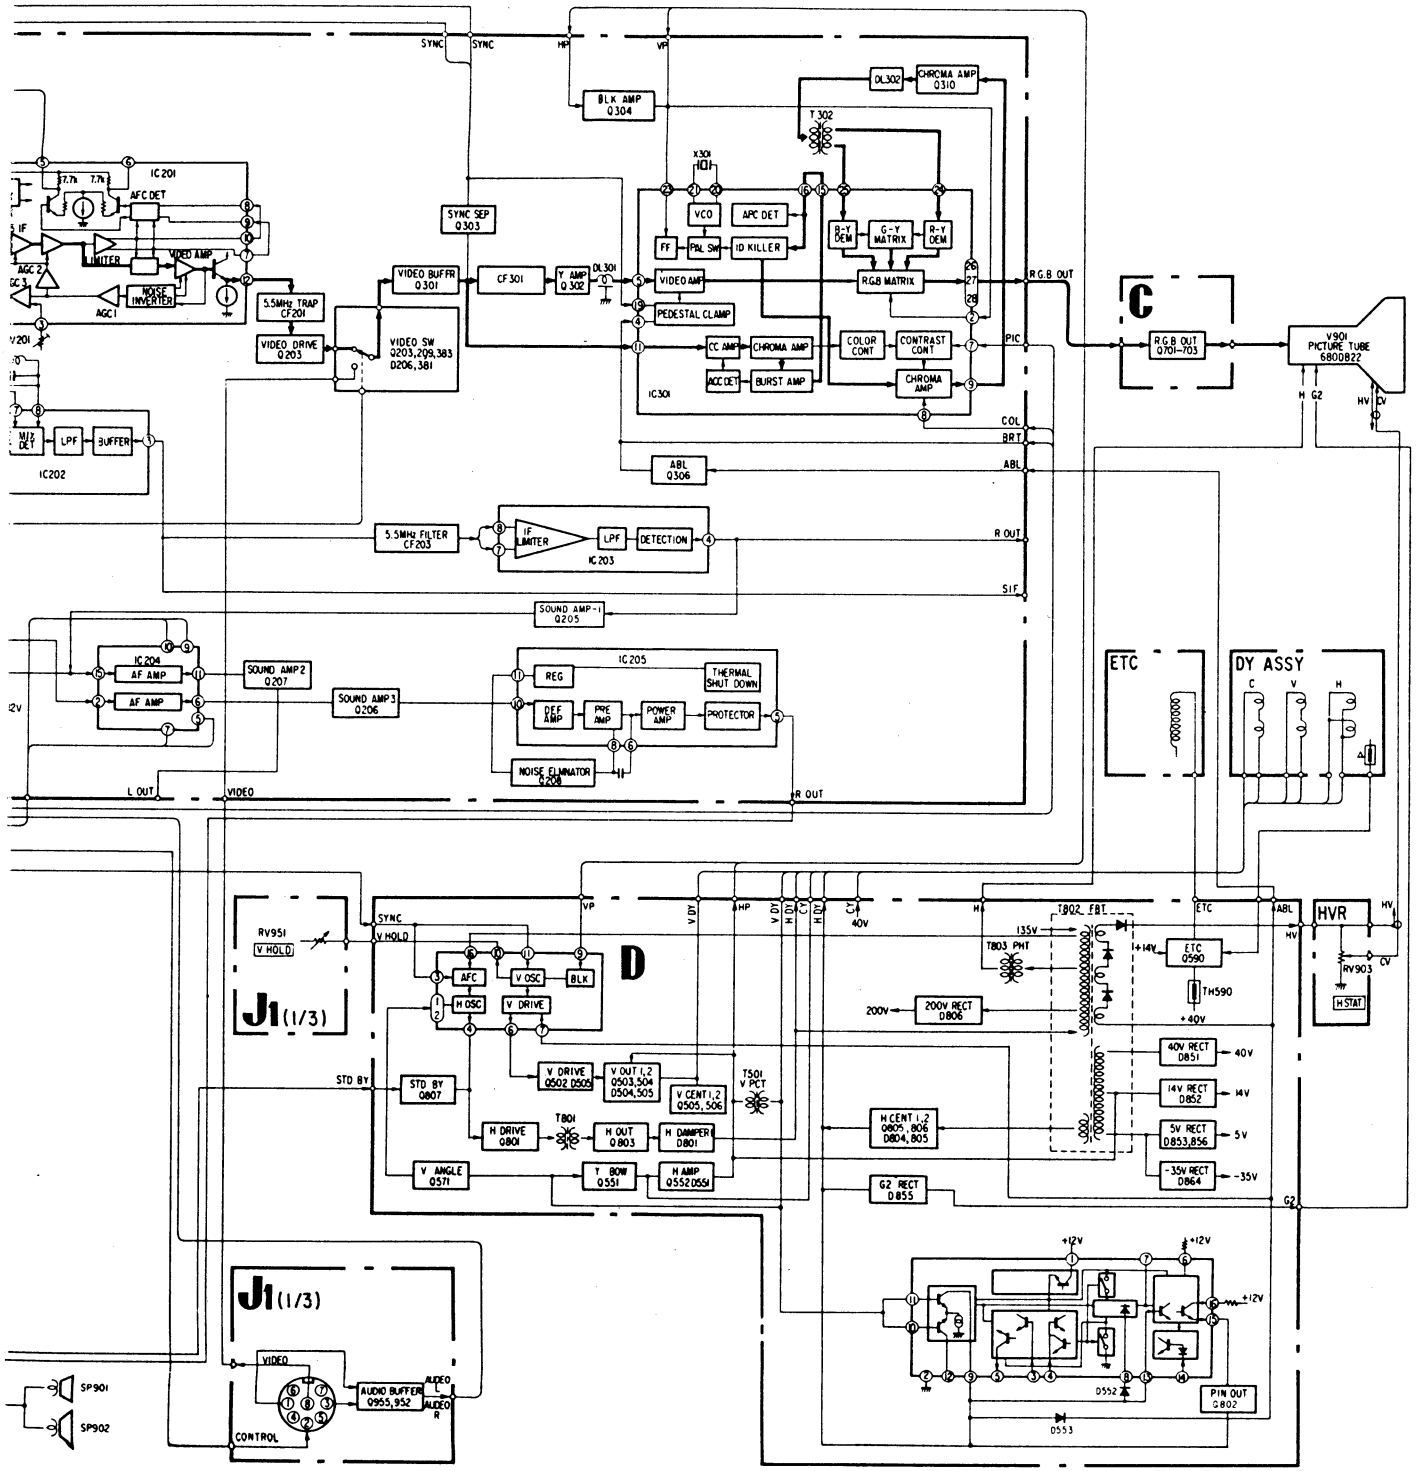
SYNC
SYNC
HP
VP
BLK AMP Q304
DL302
CHROMA AMP Q310
T302
X301
IC201
AFC DET
LIMITER
VIDEO AMP
NOISE INVERTER
AGC2
AGC1
SYNC SEP Q303
VCO
APC DET
FF
PAL SW
ID KILLER
R-Y DEM
G-Y MATRIX
B-Y DEM
5.5MHz TRAP CF201
VIDEO DRIVE Q203
VIDEO BUFFR Q301
CF301
Y AMP Q302
DL301
VIDEO AMP
PEDESTAL CLAMP
RGB MATRIX
R.G.B OUT
VIDEO SW Q203,208,383 D206,381
CC AMP
CHROMA AMP
ACC DET
BURST AMP
COLOR CONT
CONTRAST CONT
CHROMA AMP
IC301
PIC
COL
BRT
ABL
ABL Q306
C
R.G.B OUT Q701~703
V901 PICTURE TUBE 680DB22
H
G2
HV
CV
MJ2 DET
LPF
BUFFER
IC202
5.5MHz FILTER CF203
IF LIMITER
LPF
DETECTION
IC203
R OUT
SIF
SOUND AMP-1 Q205
IC204
AF AMP
AF AMP
SOUND AMP2 Q207
SOUND AMP3 Q206
IC205
REG
THERMAL SHUT DOWN
DEF AMP
PRE AMP
POWER AMP
PROTECTOR
NOISE ELIMINATOR Q208
L OUT
VIDEO
R OUT
ETC
DY ASSY
C
V
H
RV951
V HOLD
SYNC
V HOLD
AFC
V OSC
BLK
H OSC
V DRIVE
D
J1 (1/3)
VP
V DY
HP
V DY
H DY
CV
H DY
40V
H
T802 FBT
135V
T803 PMT
+14V
ETC Q590
TH590
+40V
ETC
ABL
HV
HVR
RV903
CV
H STAT
200V
200V RECT D806
40V RECT D851
40V
14V RECT D852
14V
5V RECT D853,856
5V
-35V RECT D864
-35V
STD BY
STD BY Q807
V DRIVE Q502 Q505
V OUT 1,2 Q503,504 Q504,505
V CENT 1,2 Q505,506
T501 V PCT
H DRIVE Q801
T801
H OUT Q803
H DAMPER D801
H CENT 1,2 Q805,806 D804,805
V ANGLE Q571
Y BOW Q551
H AMP Q552 D551
G2 RECT D855
G2
+12V
+12V
+12V
D552
D553
PIN OUT Q802
J1 (1/3)
VIDEO
AUDIO BUFFER Q955,952
AUDIO L
AUDIO R
CONTROL
SP901
SP902

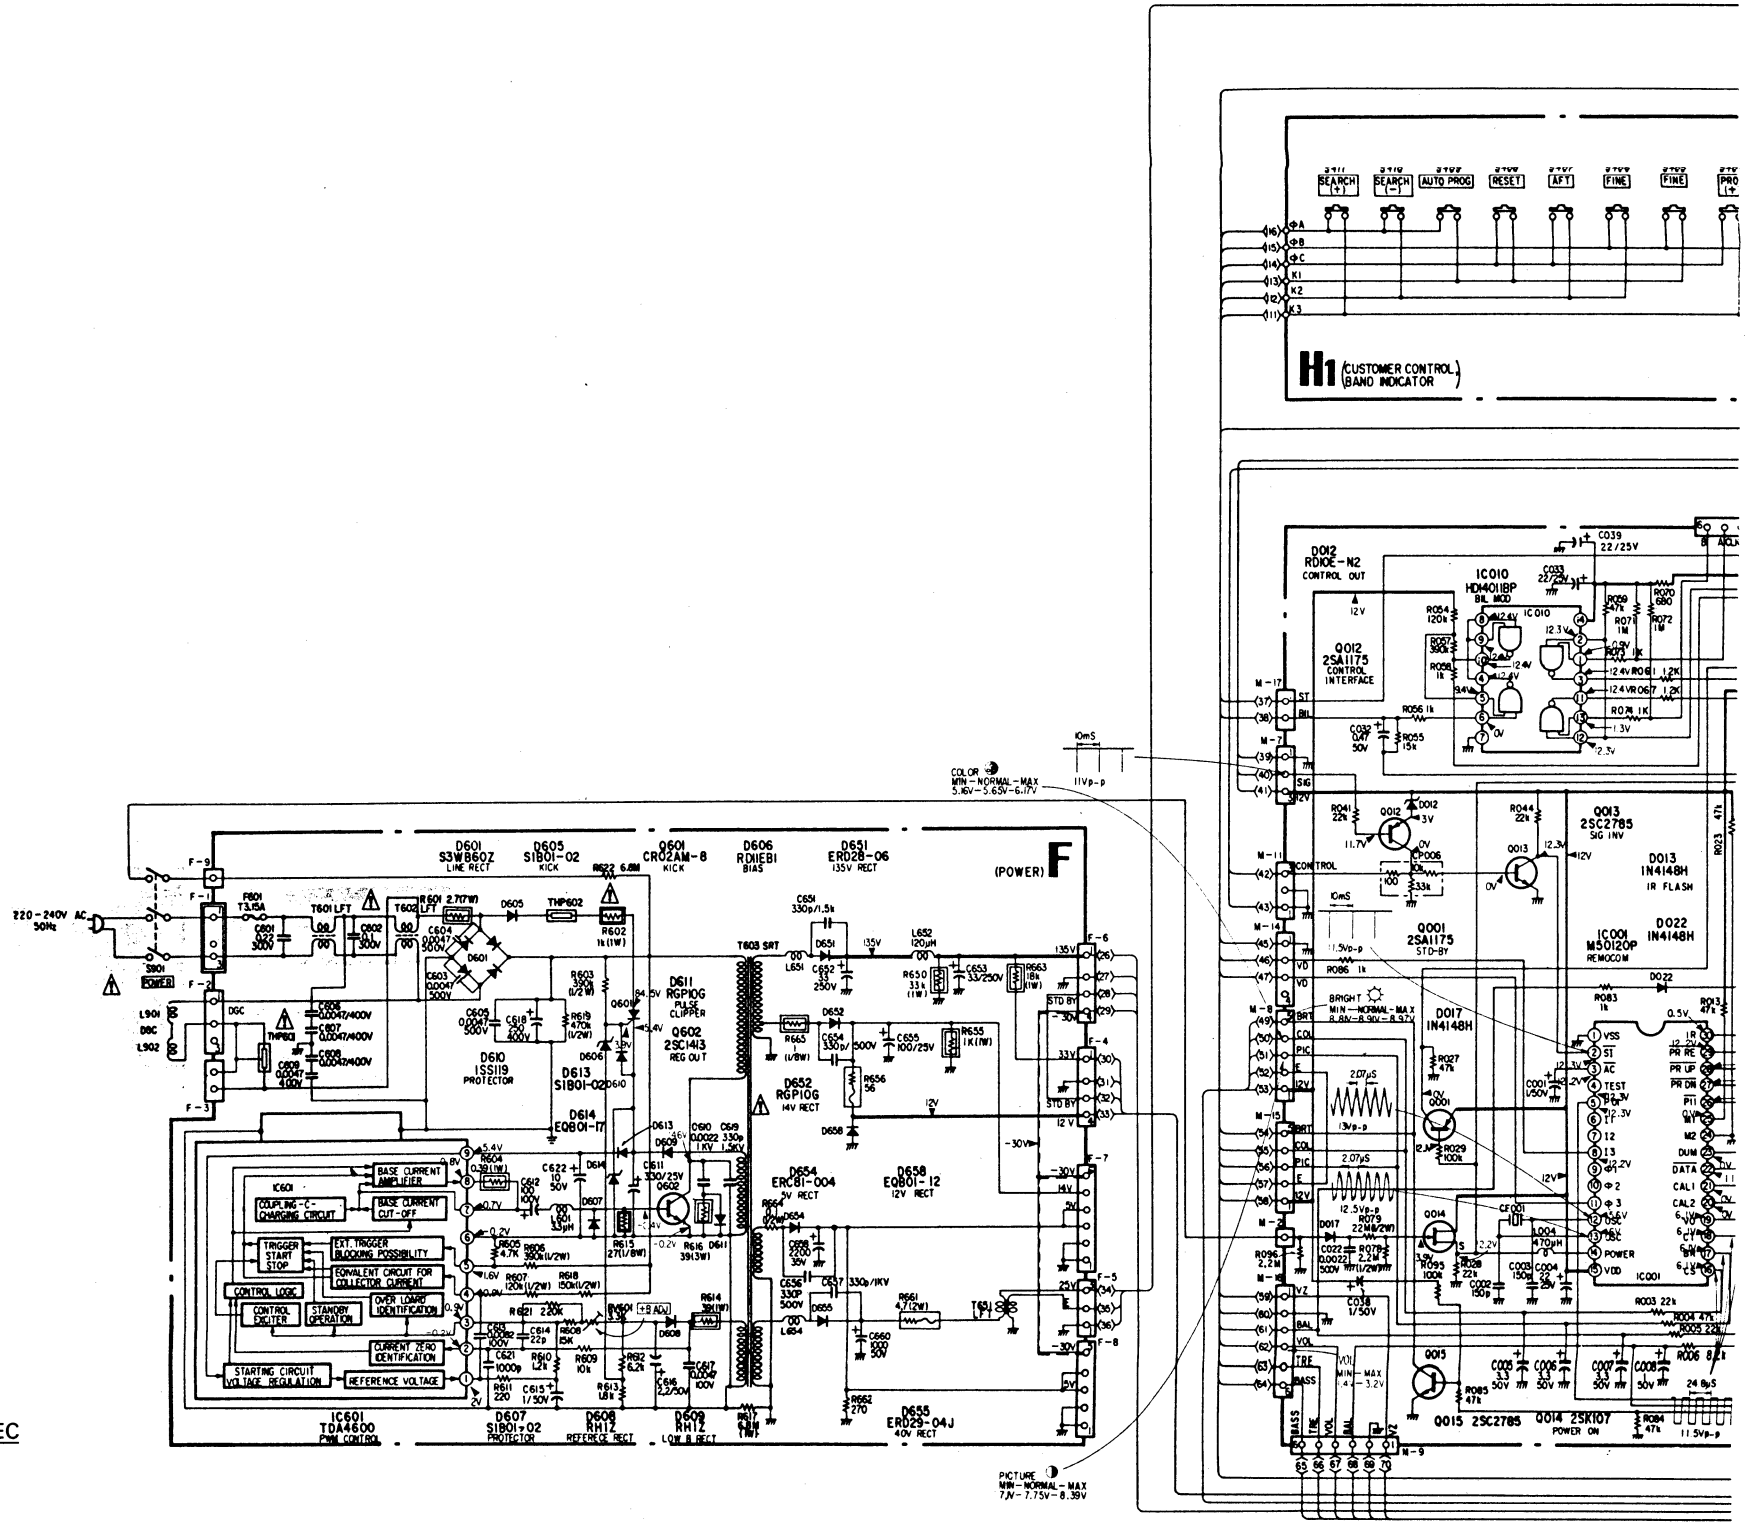
H1 (CUSTOMER CONTROL) (BAND INDICATOR
SEARCH (+)
SEARCH (-)
AUTO PROG
RESET
AFT
FINE
FINE
(POWER) F
220 - 240V AC 50Hz
D601 S3WB60Z LINE RECT
D605 S1B01-02 KICK
Q601 CR02AM-8 KICK
D606 RD1IEB1 BIAS
D651 ERD28-06 135V RECT
D611 RGP10G PULSE CLIPPER
Q602 2SC1413 REG OUT
D610 1SS119 PROTECTOR
D613 S1B01-02
D614 EQ80I-17
D652 RGP10G 14V RECT
D654 ERC81-004 5V RECT
D658 EQ80I-12 12V RECT
D655 ERD29-04J 40V RECT
D607 S1B01-02 PROTECTOR
D608 RH1Z REFERENCE RECT
D609 RH1Z LOW B RECT
IC601 TDA4600 PWM CONTROL
BASE CURRENT AMPLIFIER
COUPLING -C- CHARGING CIRCUIT
BASE CURRENT CUT-OFF
TRIGGER START STOP
EXT TRIGGER BLOCKING POSSIBILITY
EQUIVALENT CIRCUIT FOR COLLECTOR CURRENT
CONTROL LOGIC
CONTROL EXCITER
STANDBY OPERATION
OVER LOAD IDENTIFICATION
CURRENT ZERO IDENTIFICATION
STARTING CIRCUIT VOLTAGE REGULATION
REFERENCE VOLTAGE
COLOR MIN - NORMAL - MAX 5.16V - 5.65V - 6.17V
PICTURE MIN - NORMAL - MAX 7.1V - 7.75V - 8.39V
D012 RD10E-N2 CONTROL OUT
IC010 HD4011BP BIL MOD
Q012 2SA1175 CONTROL INTERFACE
Q013 2SC2785 SIG INV
D013 1N4148H IR FLASH
D022 1N4148H
IC001 M50120P REMOCOM
Q001 2SA1175 STD-BY
D017 1N4148H
Q014 2SK107 POWER ON
Q015 2SC2785
BRIGHT MIN - NORMAL - MAX 8.86V - 8.90V - 8.97V
VOL MIN - MAX 1.4V - 3.2V

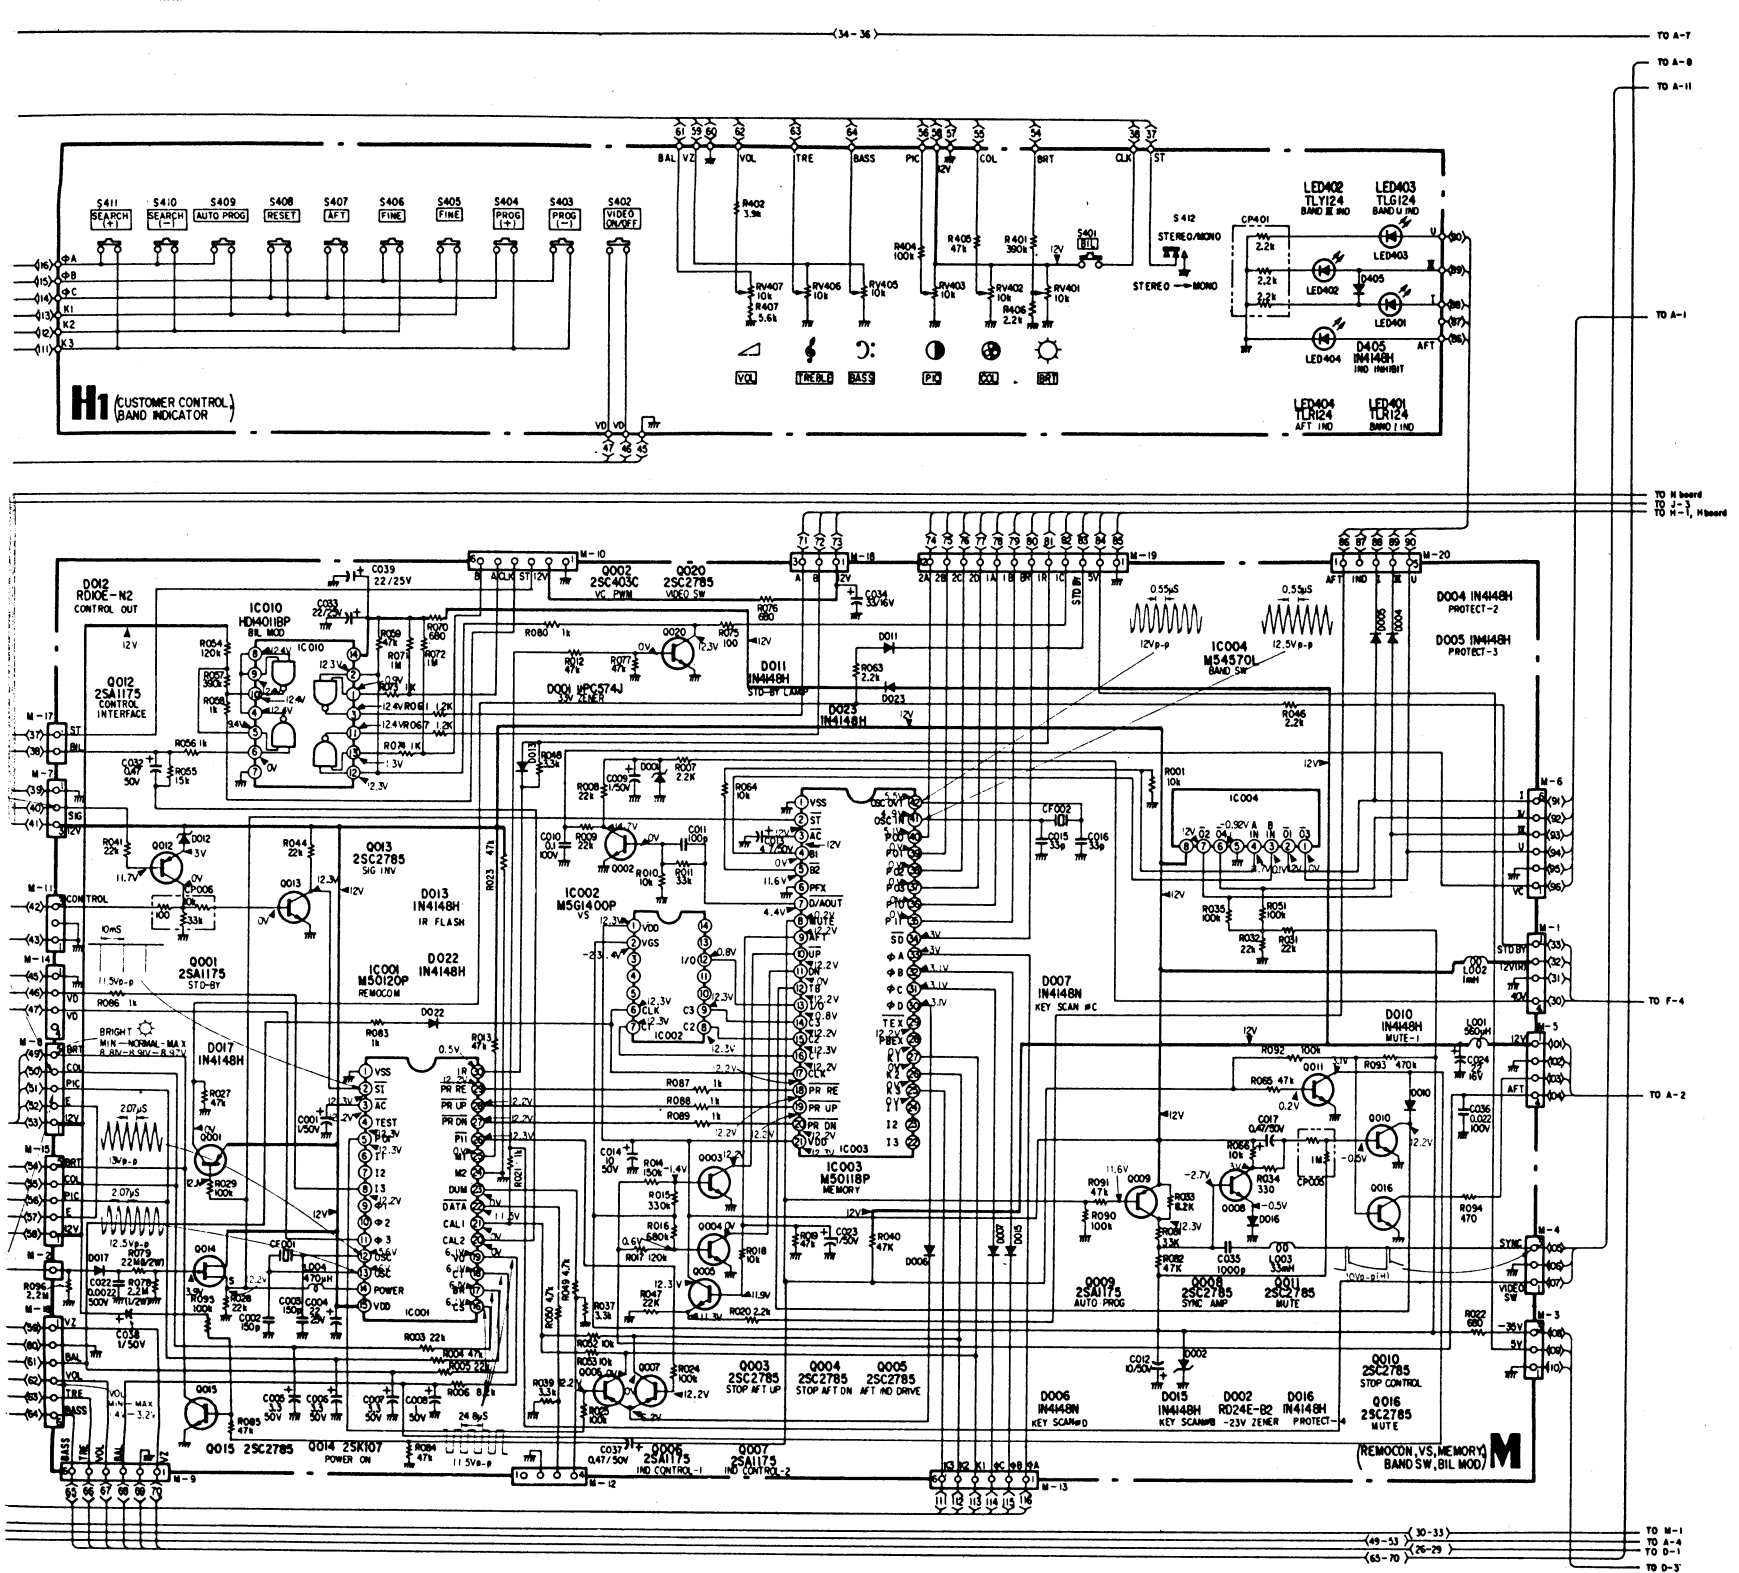
H1 (CUSTOMER CONTROL / BAND INDICATOR)
(REMOCON, VS, MEMORY) BAND SW, BIL MOD) M
IC001 M50120P REMOCOM
IC002 M5G1400P VS
IC003 M50118P MEMORY
IC004 M54570L BAND SW
IC010 HD4011BP BIL MOD
Q001 2SA1175 STD-BY
Q002 2SC403C VC PWM
Q003 2SC2785 STOP AFT UP
Q004 2SC2785 STOP AFT DN
Q005 2SC2785 AFT IND DRIVE
Q006 2SA1175 IND CONTROL-1
Q007 2SA1175 IND CONTROL-2
Q008 2SC2785 SYNC AMP
Q009 2SA1175 AUTO PROG
Q010 2SC2785 STOP CONTROL
Q011 2SC2785 MUTE
Q012 2SA1175 CONTROL INTERFACE
Q013 2SC2785 SIG INV
Q014 2SK107 POWER ON
Q015 2SC2785
Q016 2SC2785 MUTE
Q020 2SC2785 VIDEO SW
D001 μPC574J 5V ZENER
D002 RD24E-B2 -23V ZENER
D004 IN4148H PROTECT-2
D005 IN4148H PROTECT-3
D006 IN4148N KEY SCAN #D
D007 IN4148N KEY SCAN #C
D010 IN4148H MUTE-1
D011 IN4148H STD-BY LAMP
D012 RD10E-N2 CONTROL OUT
D013 IN4148H IR FLASH
D015 IN4148H KEY SCAN #B
D016 IN4148H PROTECT-4
D017 IN4148H
D022 IN4148H
D023 IN4148H
D405 IN4148H IND INHIBIT
LED401 TLR124 BAND T IND
LED402 TLY124 BAND M IND
LED403 TLG124 BAND U IND
LED404 TLR124 AFT IND
S401 BTL
S402 VIDEO ON/OFF
S403 PROG (-)
S404 PROG (+)
S405 FINE
S406 FINE
S407 AFT
S408 RESET
S409 AUTO PROG
S410 SEARCH (-)
S411 SEARCH (+)
S412 STEREO/MONO
TO A-1
TO A-2
TO A-6
TO A-7
TO A-11
TO F-4
TO M-1
TO A-4
TO D-1
TO D-3
TO N board
TO J-3
TO M-1, N board

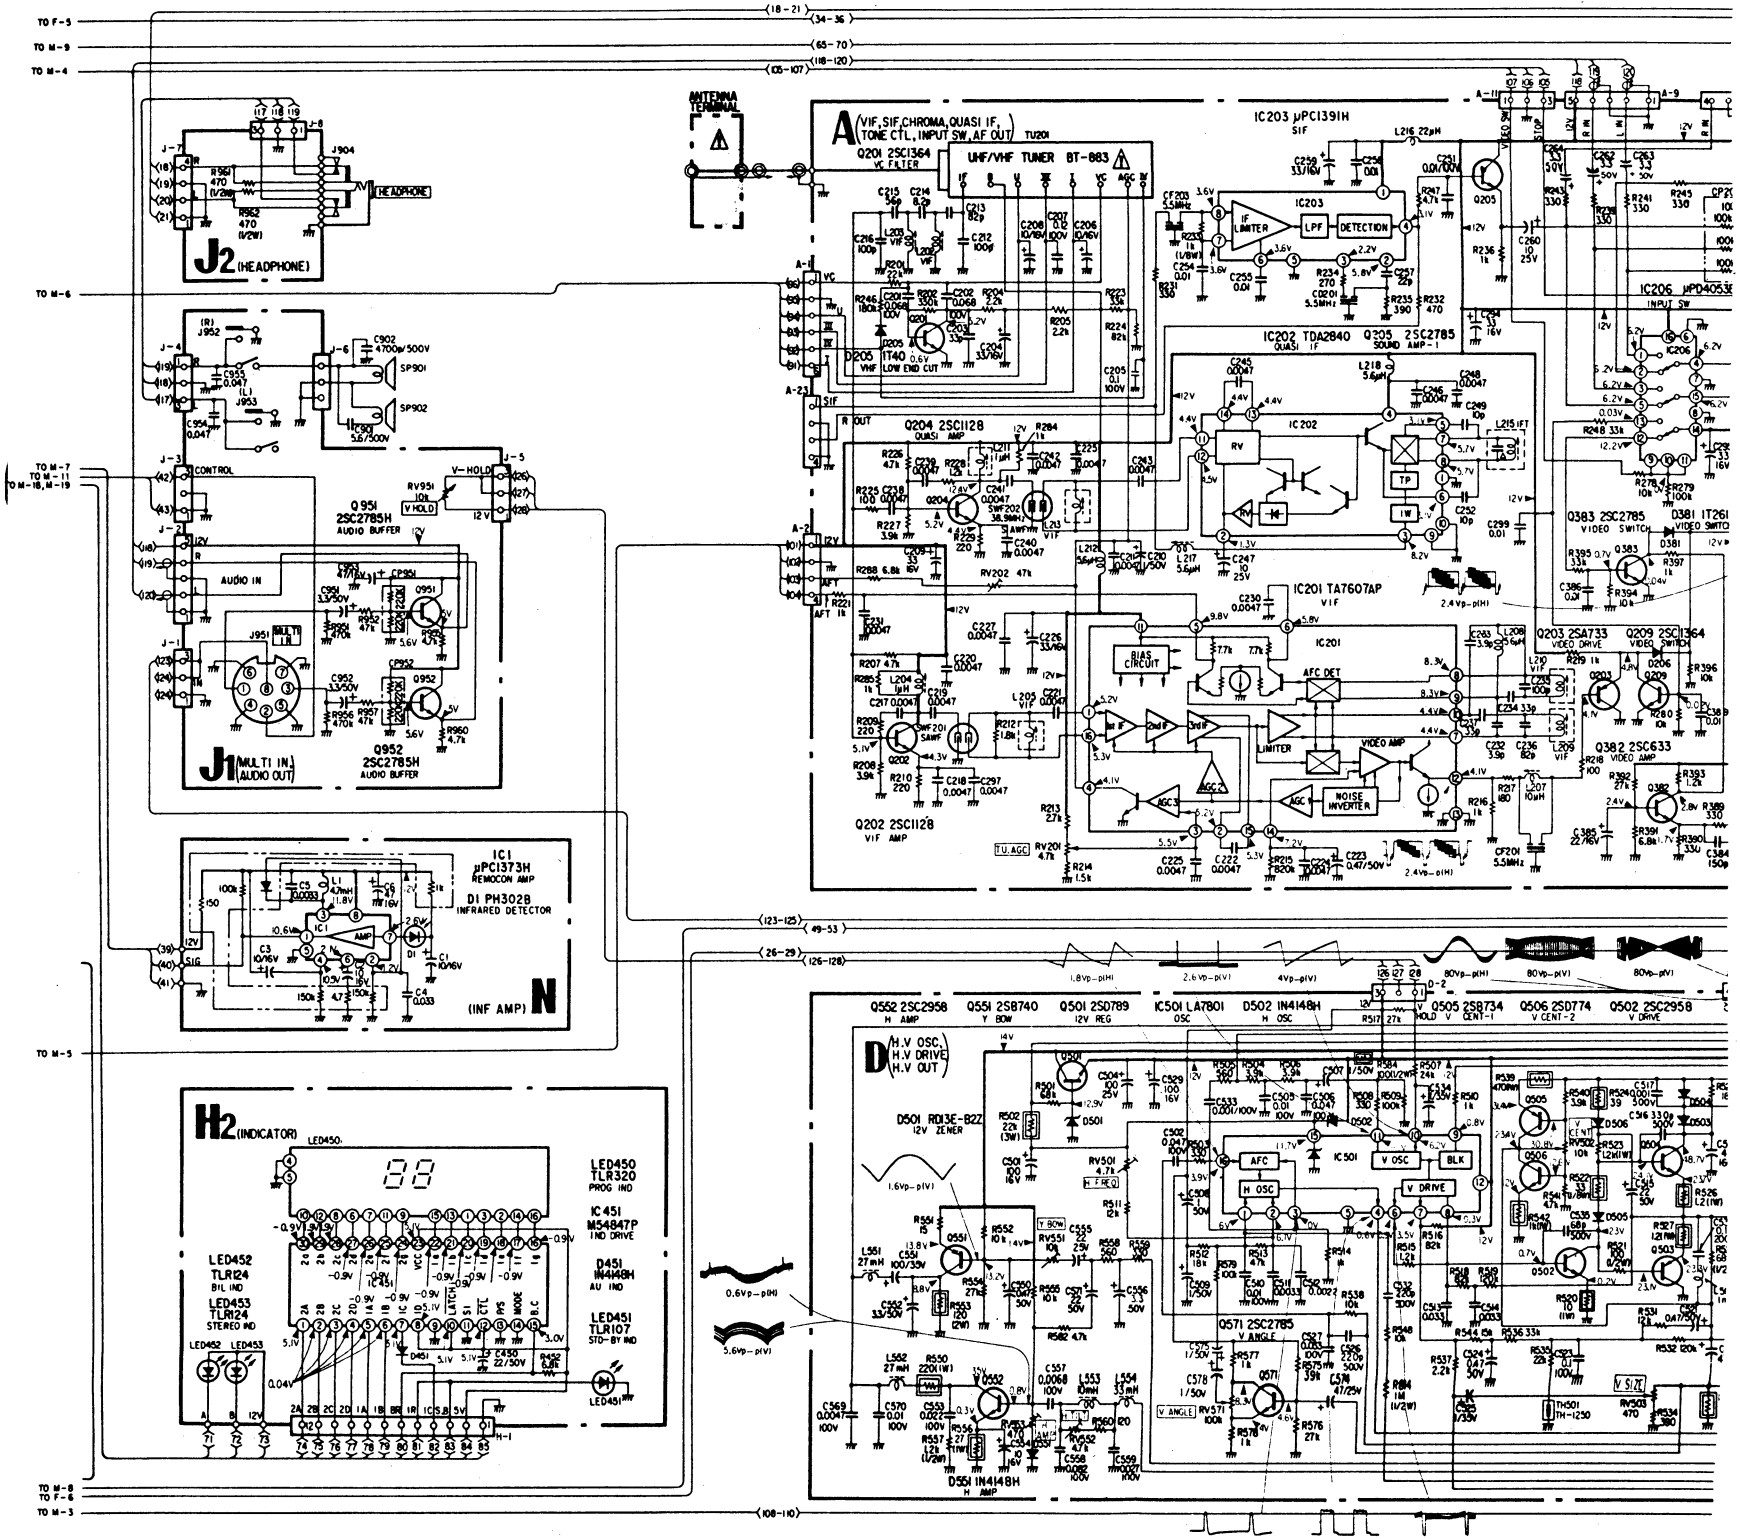
A (VIF, SIF, CHROMA, QUASI IF, TONE CTL, INPUT SW, AF OUT)
UHF/VHF TUNER BT-883
IC203 μPC1391H SIF
IC202 TDA2840 QUASI IF
IC201 TA7607AP VIF
Q201 2SC1364 VIF FILTER
Q204 2SC1128 QUASI AMP
Q202 2SC1128 VIF AMP
Q205 2SC2785 SOUND AMP-1
Q203 2SA733 VIDEO DRIVE
Q209 2SC1364 VIDEO SWITCH
Q382 2SC633 VIDEO AMP
Q383 2SC2785 VIDEO SWITCH
D205 1T40 VHF LOW END CUT
D381 1T261 VIDEO SWITCH
IC206 μPD4053B INPUT SW
ANTENNA TERMINAL
J2 (HEADPHONE)
J1 (MULTI IN, AUDIO OUT)
Q951 2SC2785H AUDIO BUFFER
Q952 2SC2785H AUDIO BUFFER
N (INF AMP)
IC1 μPC1373H REMOCON AMP
D1 PH3028 INFRARED DETECTOR
H2 (INDICATOR)
LED450 TLR320 PROG IND
IC451 M54847P IND DRIVE
D451 1N4148H AU IND
LED451 TLR107 STD-BY IND
LED452 TLR124 BIL IND
LED453 TLR124 STEREO IND
D (H.V OSC, H.V DRIVE, H.V OUT)
Q552 2SC2958 H AMP
Q551 2SB740 Y BOW
Q501 2SD789 12V REG
IC501 LA7801 OSC
D502 1N4148H H OSC
Q505 2SB734 V CENT-1
Q506 2SD774 V CENT-2
Q502 2SC2958 V DRIVE
D501 RD13E-B2Z 12V ZENER
Q571 2SC2785 V ANGLE
D551 1N4148H H AMP
TO F-5
TO M-9
TO M-4
TO M-6
TO M-7
TO M-11
TO M-18, M-19
TO M-5
TO M-8
TO F-6
TO M-3

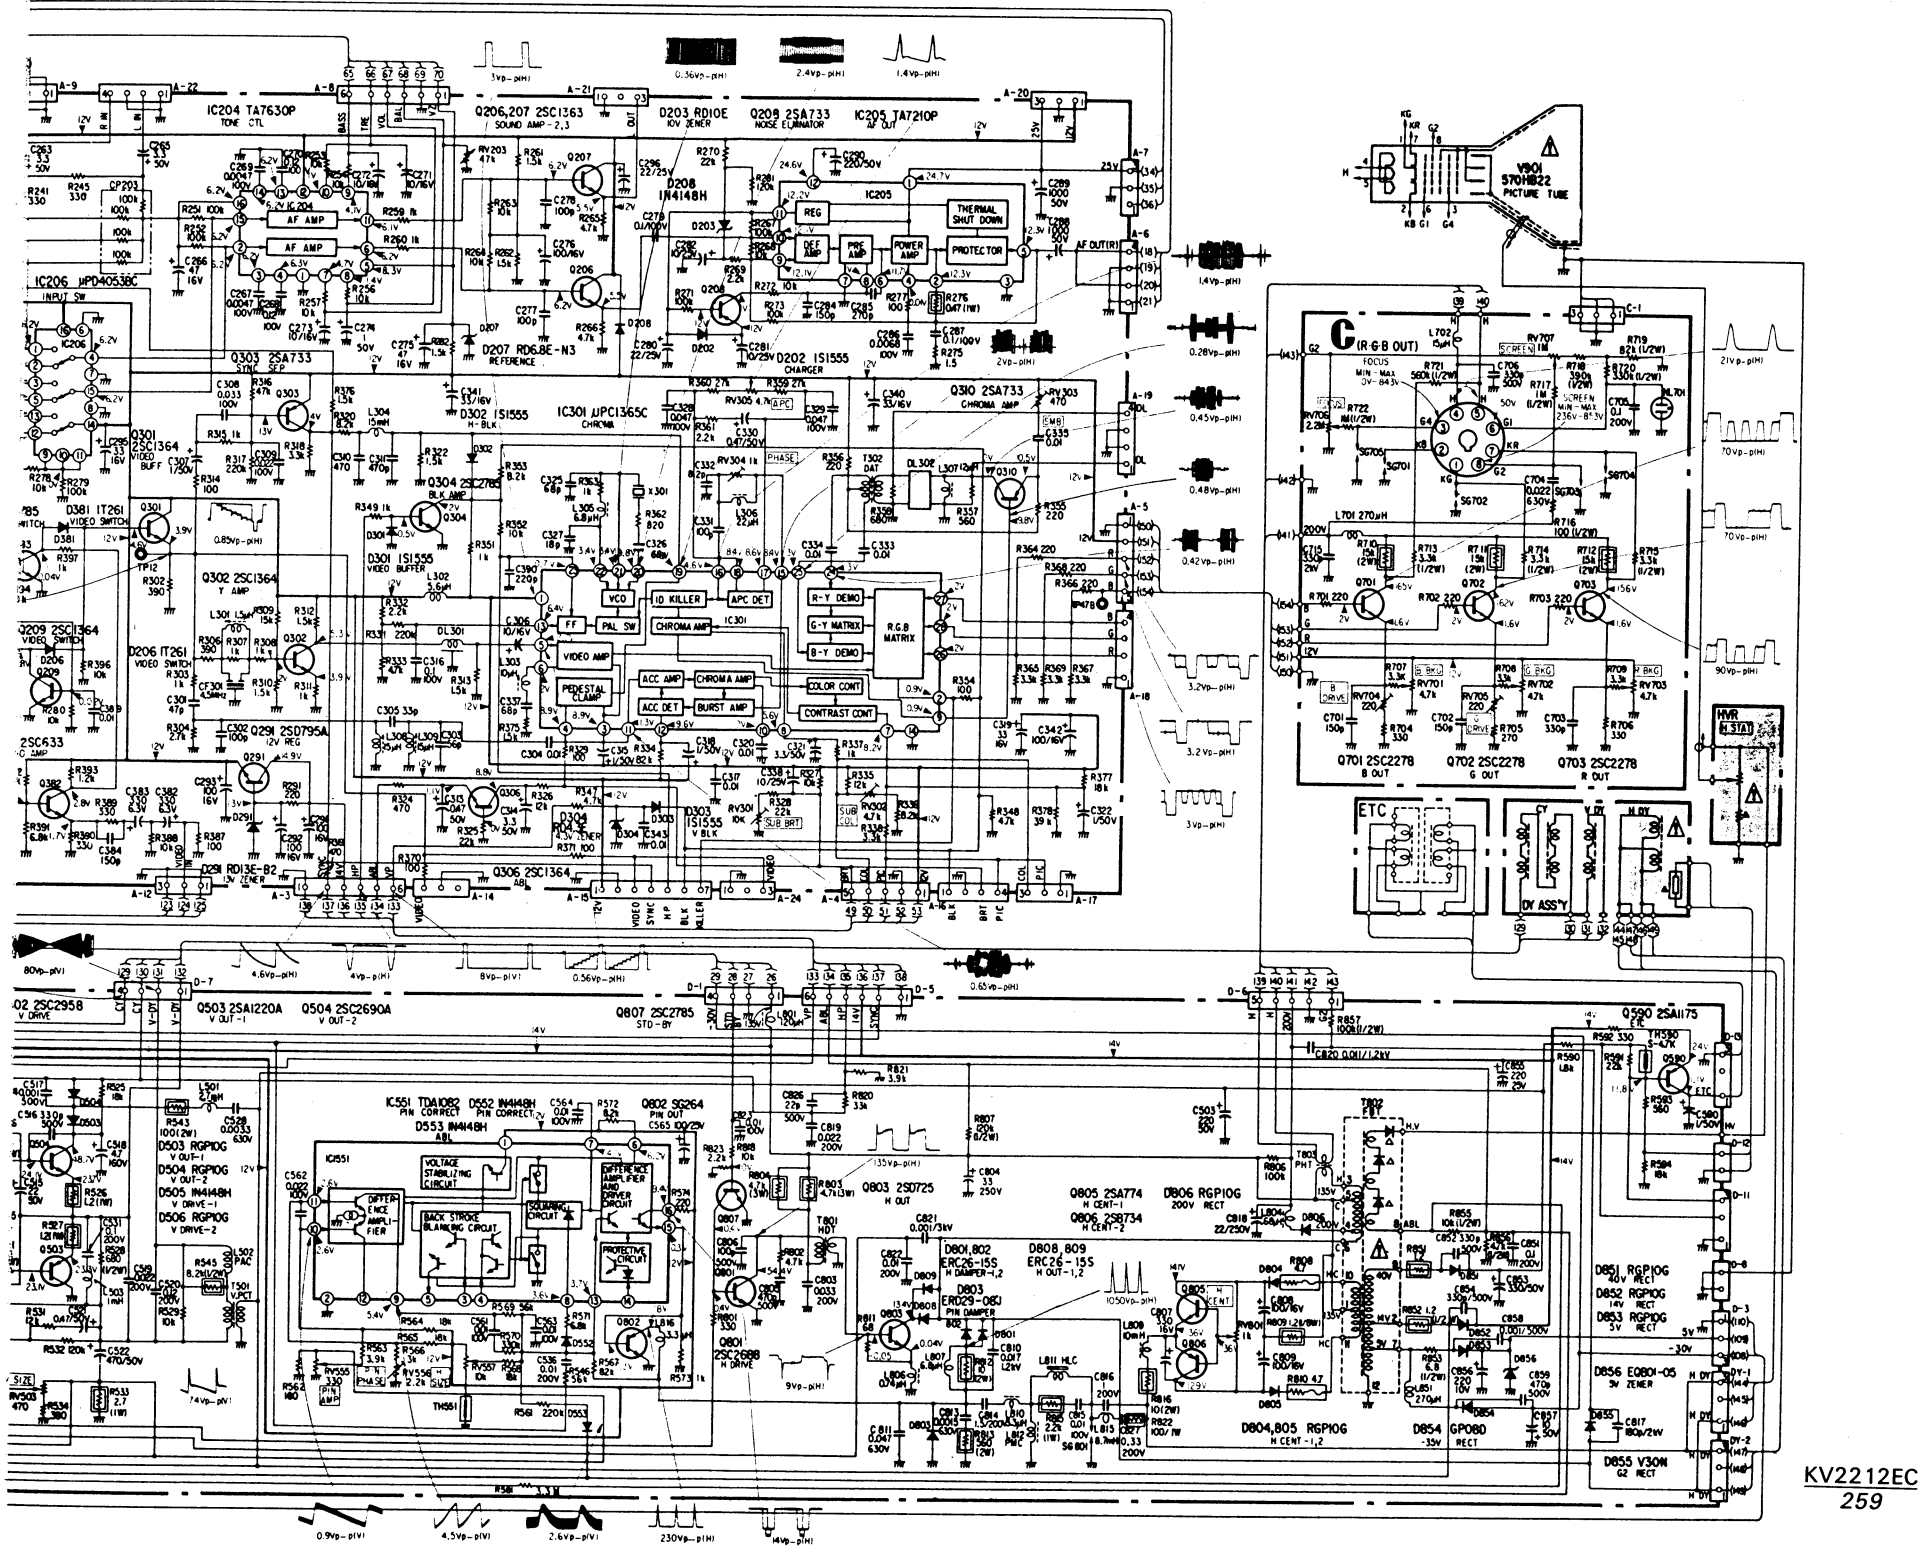
IC204 TA7630P
TONE CTL
Q206,207 2SC1363
SOUND AMP-2,3
D203 RD10E
10V ZENER
Q209 2SA733
NOISE ELIMINATOR
IC205 TA7210P
AF OUT
D208 1N4148H
IC206 μPD40536C
INPUT SW
Q303 2SA733
SYNC SEP
D207 RD6.8E-N3
REFERENCE
D202 1S1555
CHARGER
IC301 μPC1365C
CHROMA
Q310 2SA733
CHROMA AMP
Q301 2SC1364
VIDEO BUFF
D381 1T261
VIDEO SWITCH
Q304 2SC2785
BLK AMP
D301 1S1555
VIDEO BUFFER
Q302 2SC1364
Y AMP
D206 1T261
VIDEO SWITCH
Q209 2SC1364
VIDEO SWITCH
2SC633
CHROMA AMP
Q291 2SD795A
12V REG
D291 RD13E-B2
13V ZENER
Q306 2SC1364
ABL
VCO
ID KILLER
APC DET
PAL SW
CHROMA AMP
VIDEO AMP
PEDESTAL CLAMP
ACC AMP
ACC DET
BURST AMP
R-Y DEMO
G-Y MATRIX
B-Y DEMO
R.G.B MATRIX
COLOR CONT
CONTRAST CONT
THERMAL SHUT DOWN
REG
DEF AMP
PRE AMP
POWER AMP
PROTECTOR
V301
S70HB22
PICTURE TUBE
C (R-G-B OUT)
FOCUS
SCREEN
Q701 2SC2278
B OUT
Q702 2SC2278
G OUT
Q703 2SC2278
R OUT
ETC
DY ASS'Y
H.V.R
H. STAT
Q503 2SA1220A
V OUT-1
Q504 2SC2690A
V OUT-2
Q807 2SC2785
STD-BY
Q590 2SA1175
PIC
IC551 TDA1082
D553 1N4148H
Q802 SG264
D503 RGP10G
V OUT-1
D504 RGP10G
V OUT-2
D505 1N4148H
V DRIVE-1
D506 RGP10G
V DRIVE-2
VOLTAGE STABILIZING CIRCUIT
DIFFERENCE AMPLIFIER AND DRIVER CIRCUIT
OPTICAL COUPLER AMPLIFIER
BACK STROKE BLANKING CIRCUIT
SQUARING CIRCUIT
PROTECTIVE CIRCUIT
Q803 2SD725
H OUT
Q805 2SA774
H CENT-1
Q806 2SB734
H CENT-2
D806 RGP10G
200V RECT
D801,802
ERC26-15S
H DAMPER-1,2
D803
ERD29-06J
PIN DAMPER
D808,809
ERC26-15S
H OUT-1,2
Q801
2SC2688
H DRIVE
D851 RGP10G
40V RECT
D852 RGP10G
14V RECT
D853 RGP10G
5V RECT
D856 EQ01-05
5V ZENER
D854 GP08D
-35V RECT
D855 V30W
G2 RECT
D804,805 RGP10G
H CENT-1,2

— M Board —

Q · IC	D
IC 001	
014	
013	
015	
012	
	012
009	
010,011	
008	
	016
	005
007	004
	022
006	
005	
001	006
016	
IC002	
	015
IC003	002
004,003	
002	
	013
	011
	001

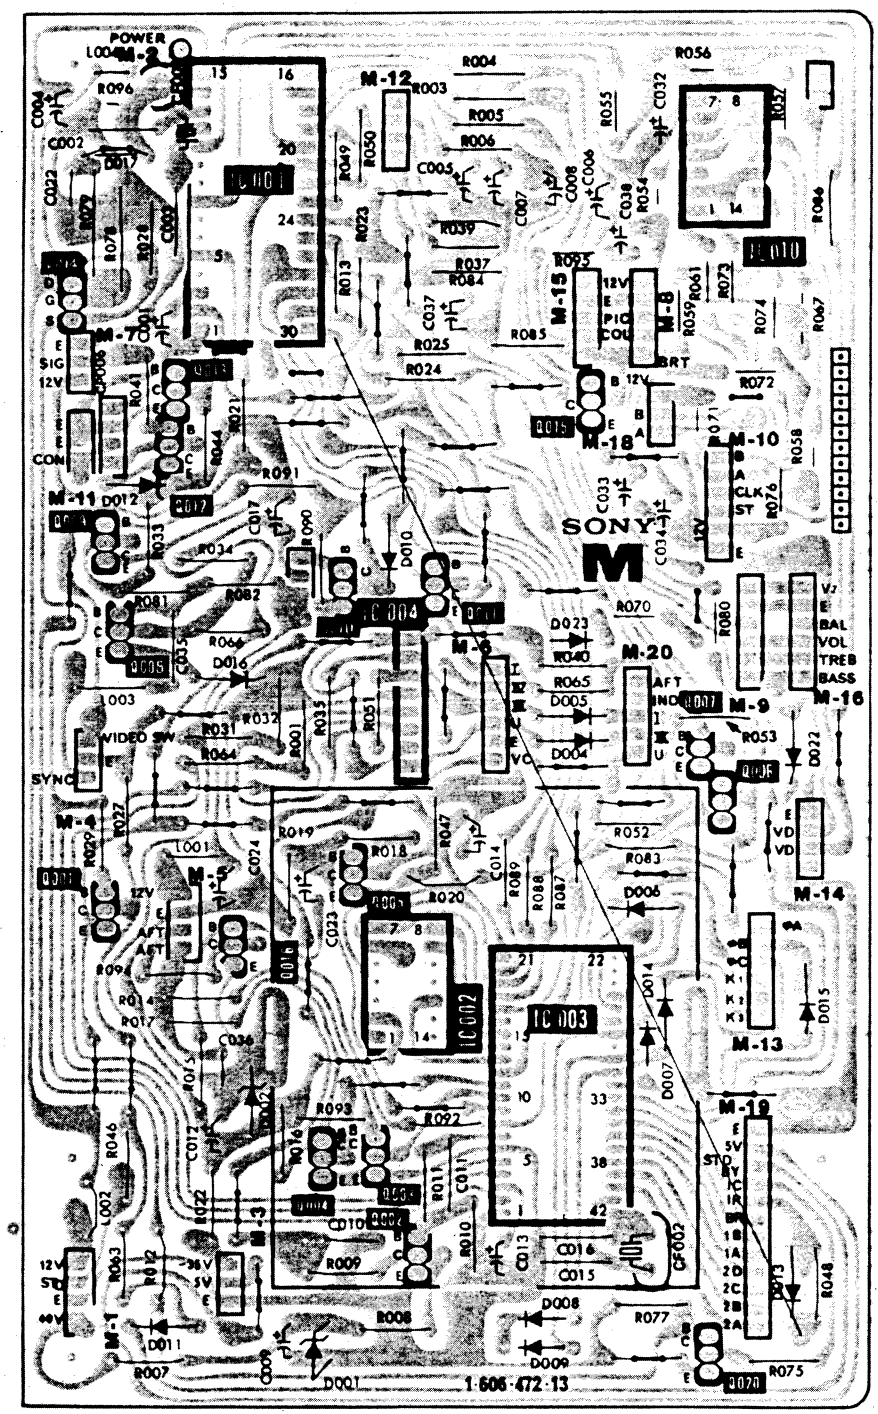

— C Board —

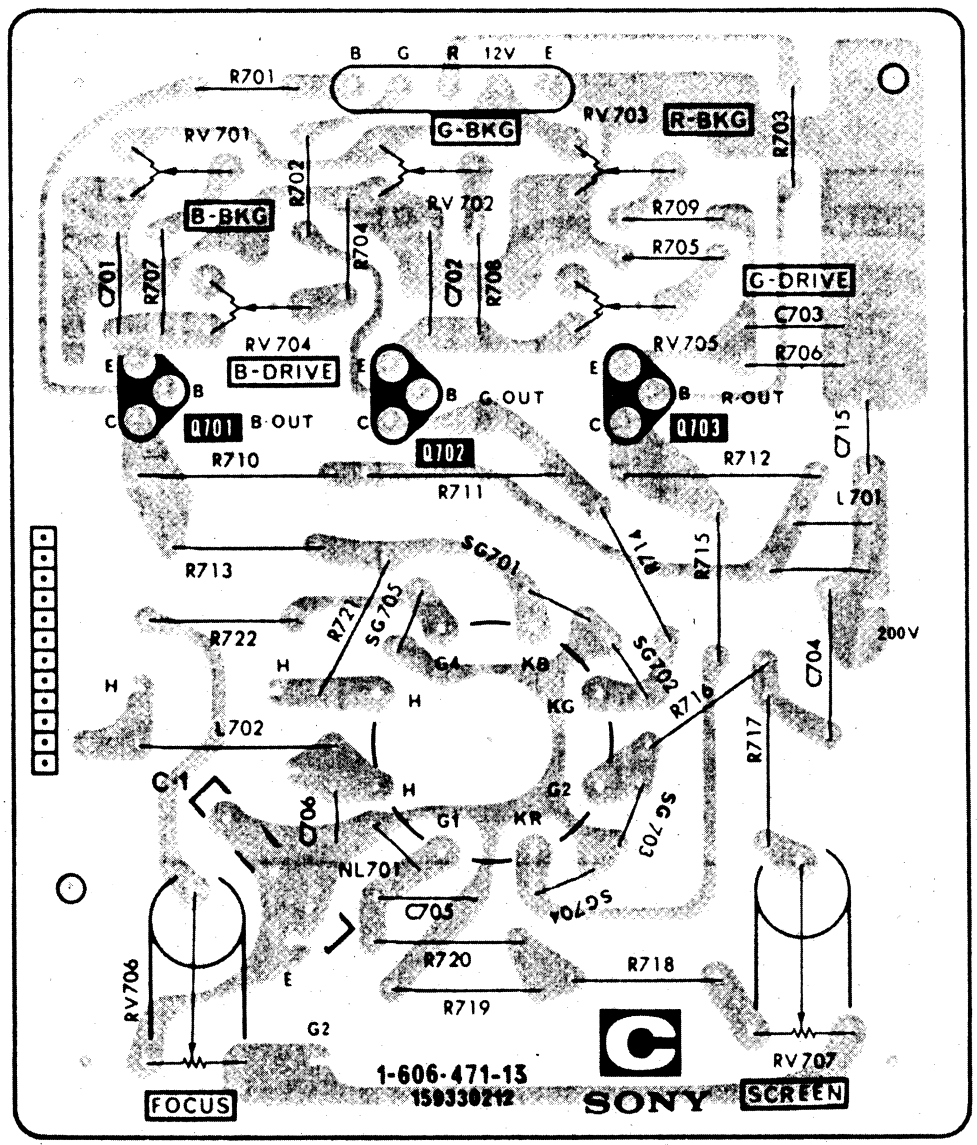

– J_2 Board –

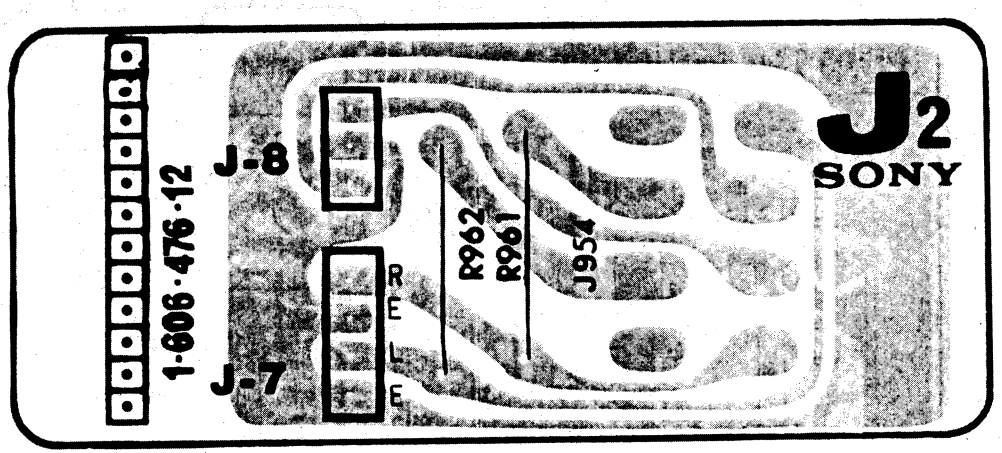

– N Board –

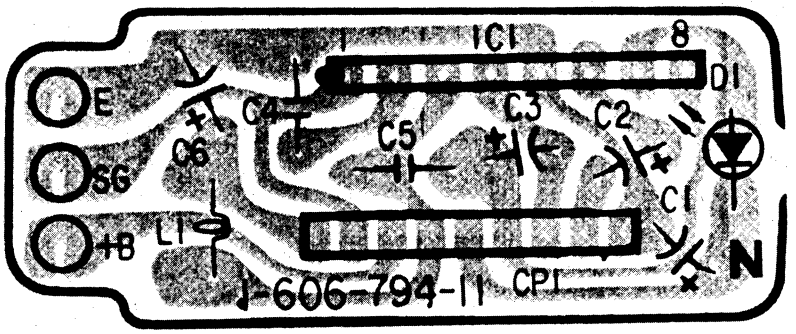

– H_1 Board –

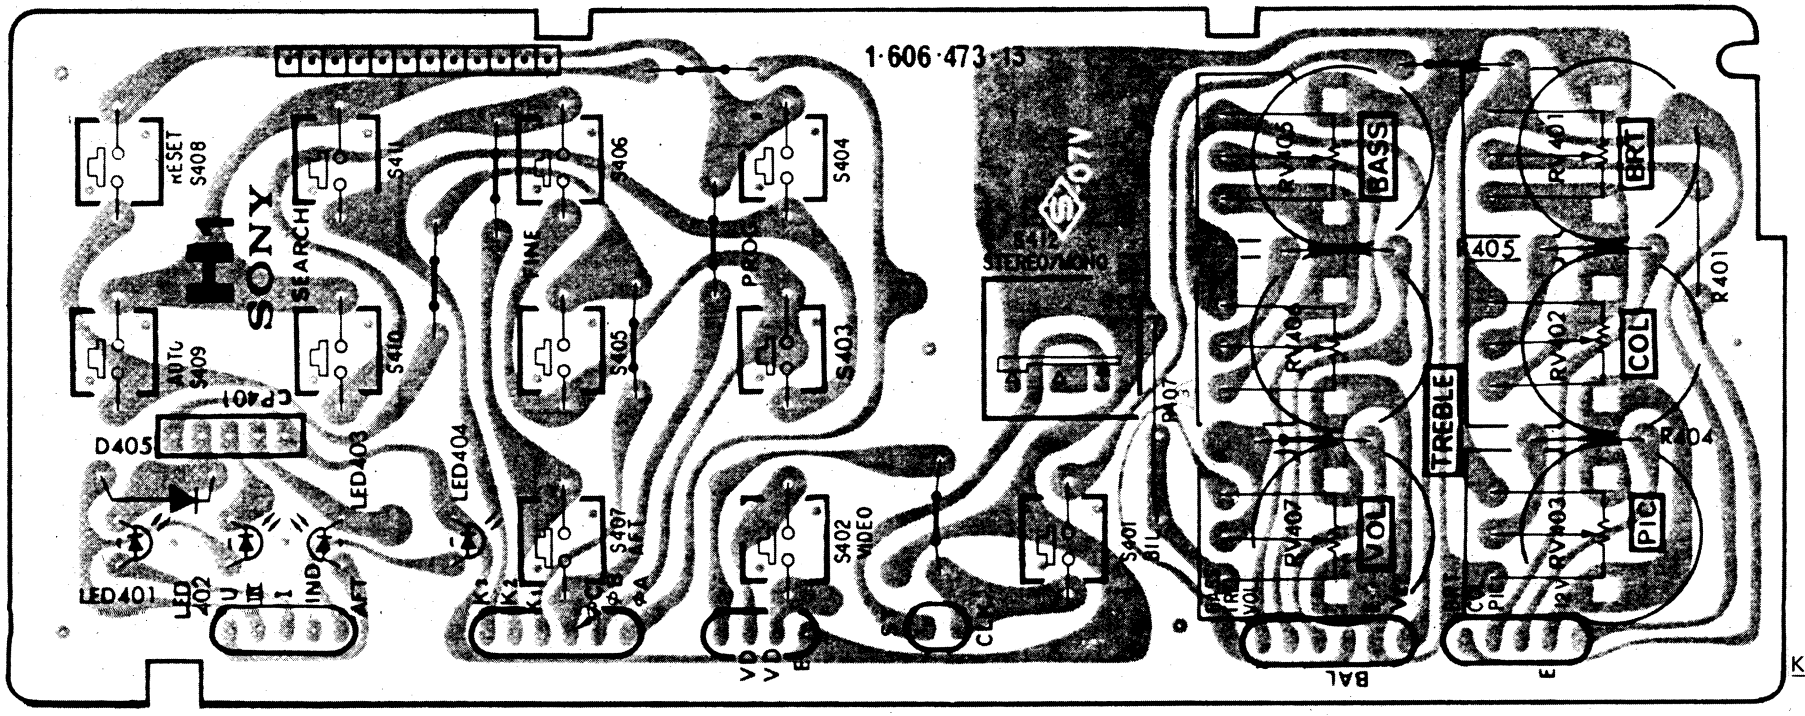

KV2212EC
261

– F Board –

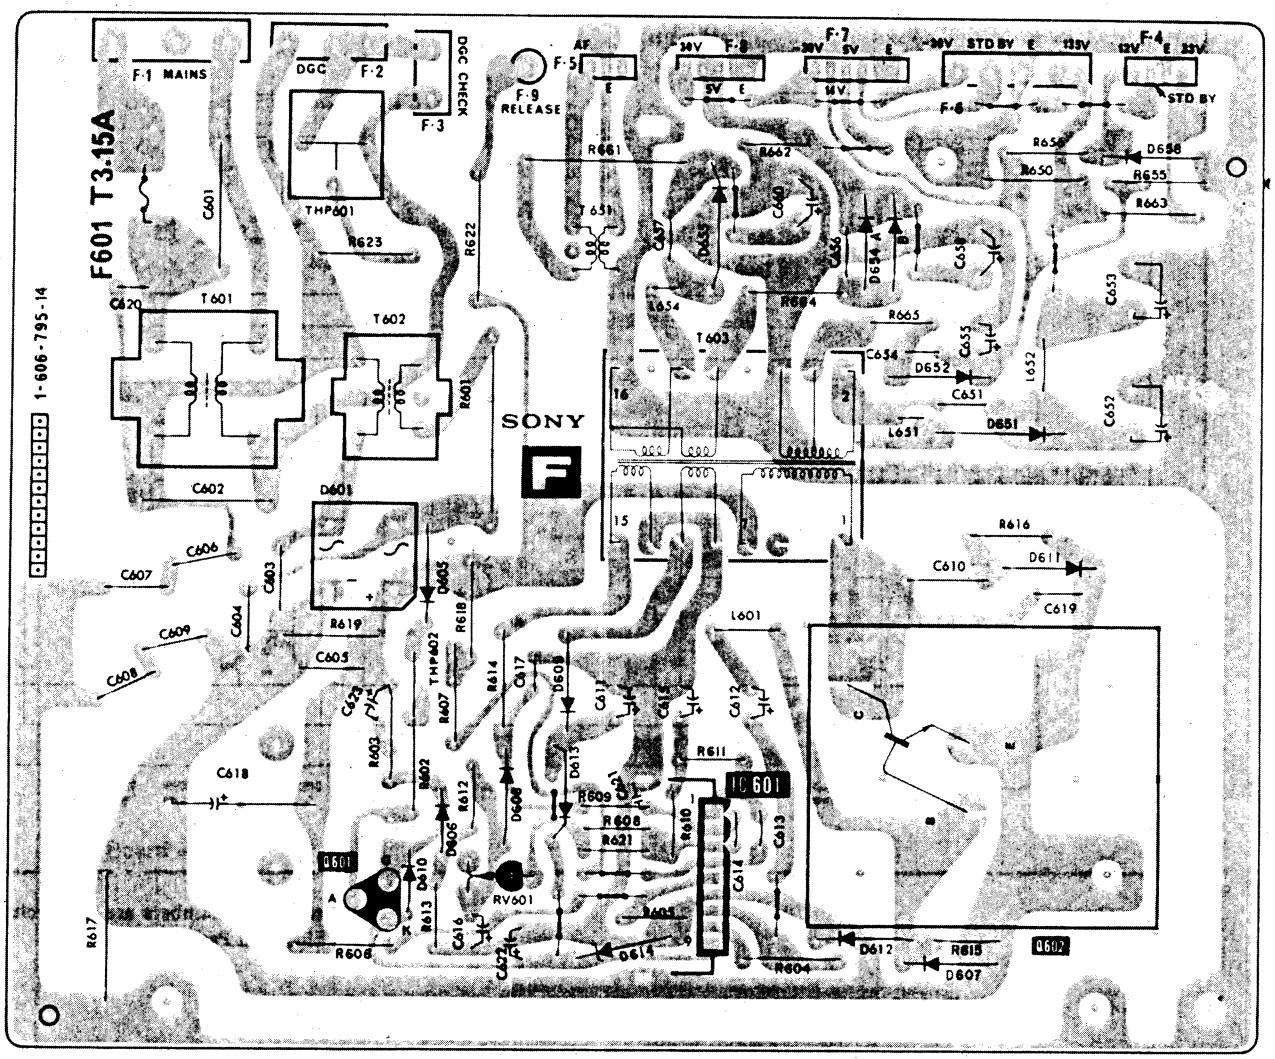

– H_2 Board –

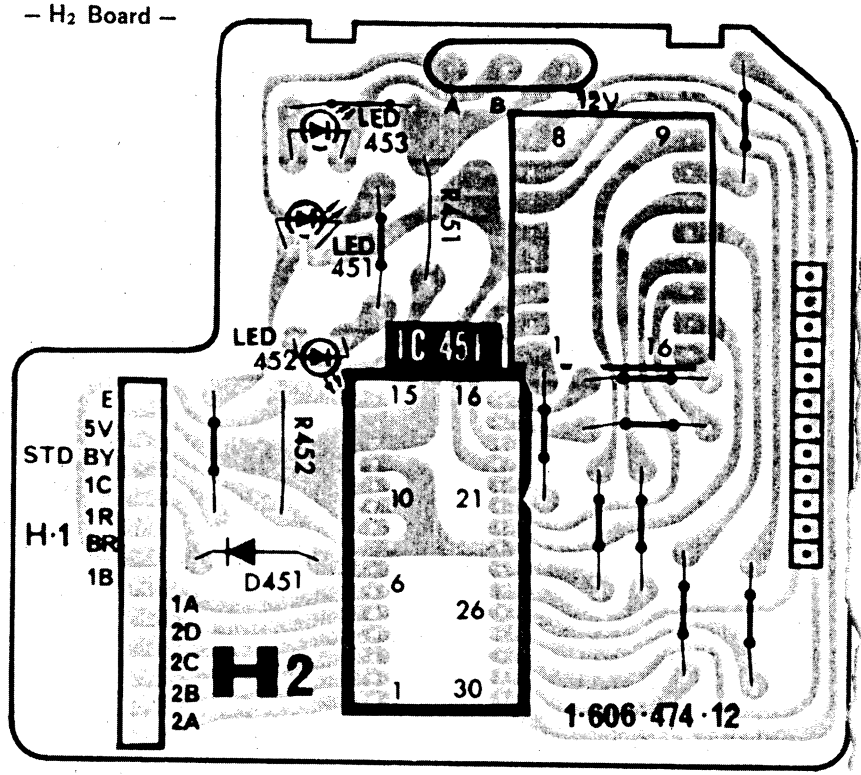

– J_1 Board –

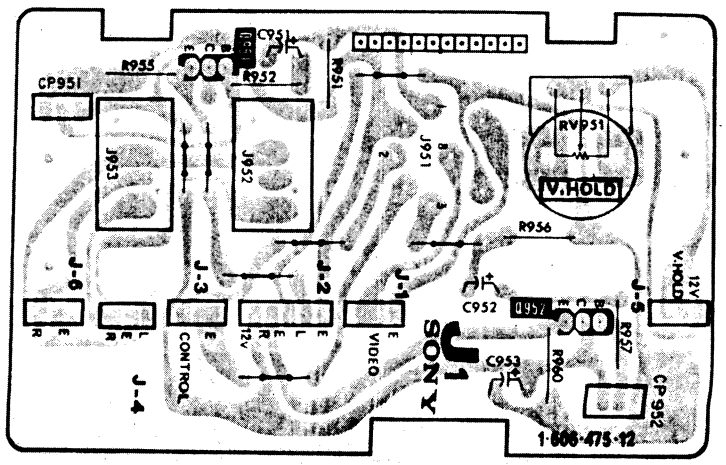

D Board –

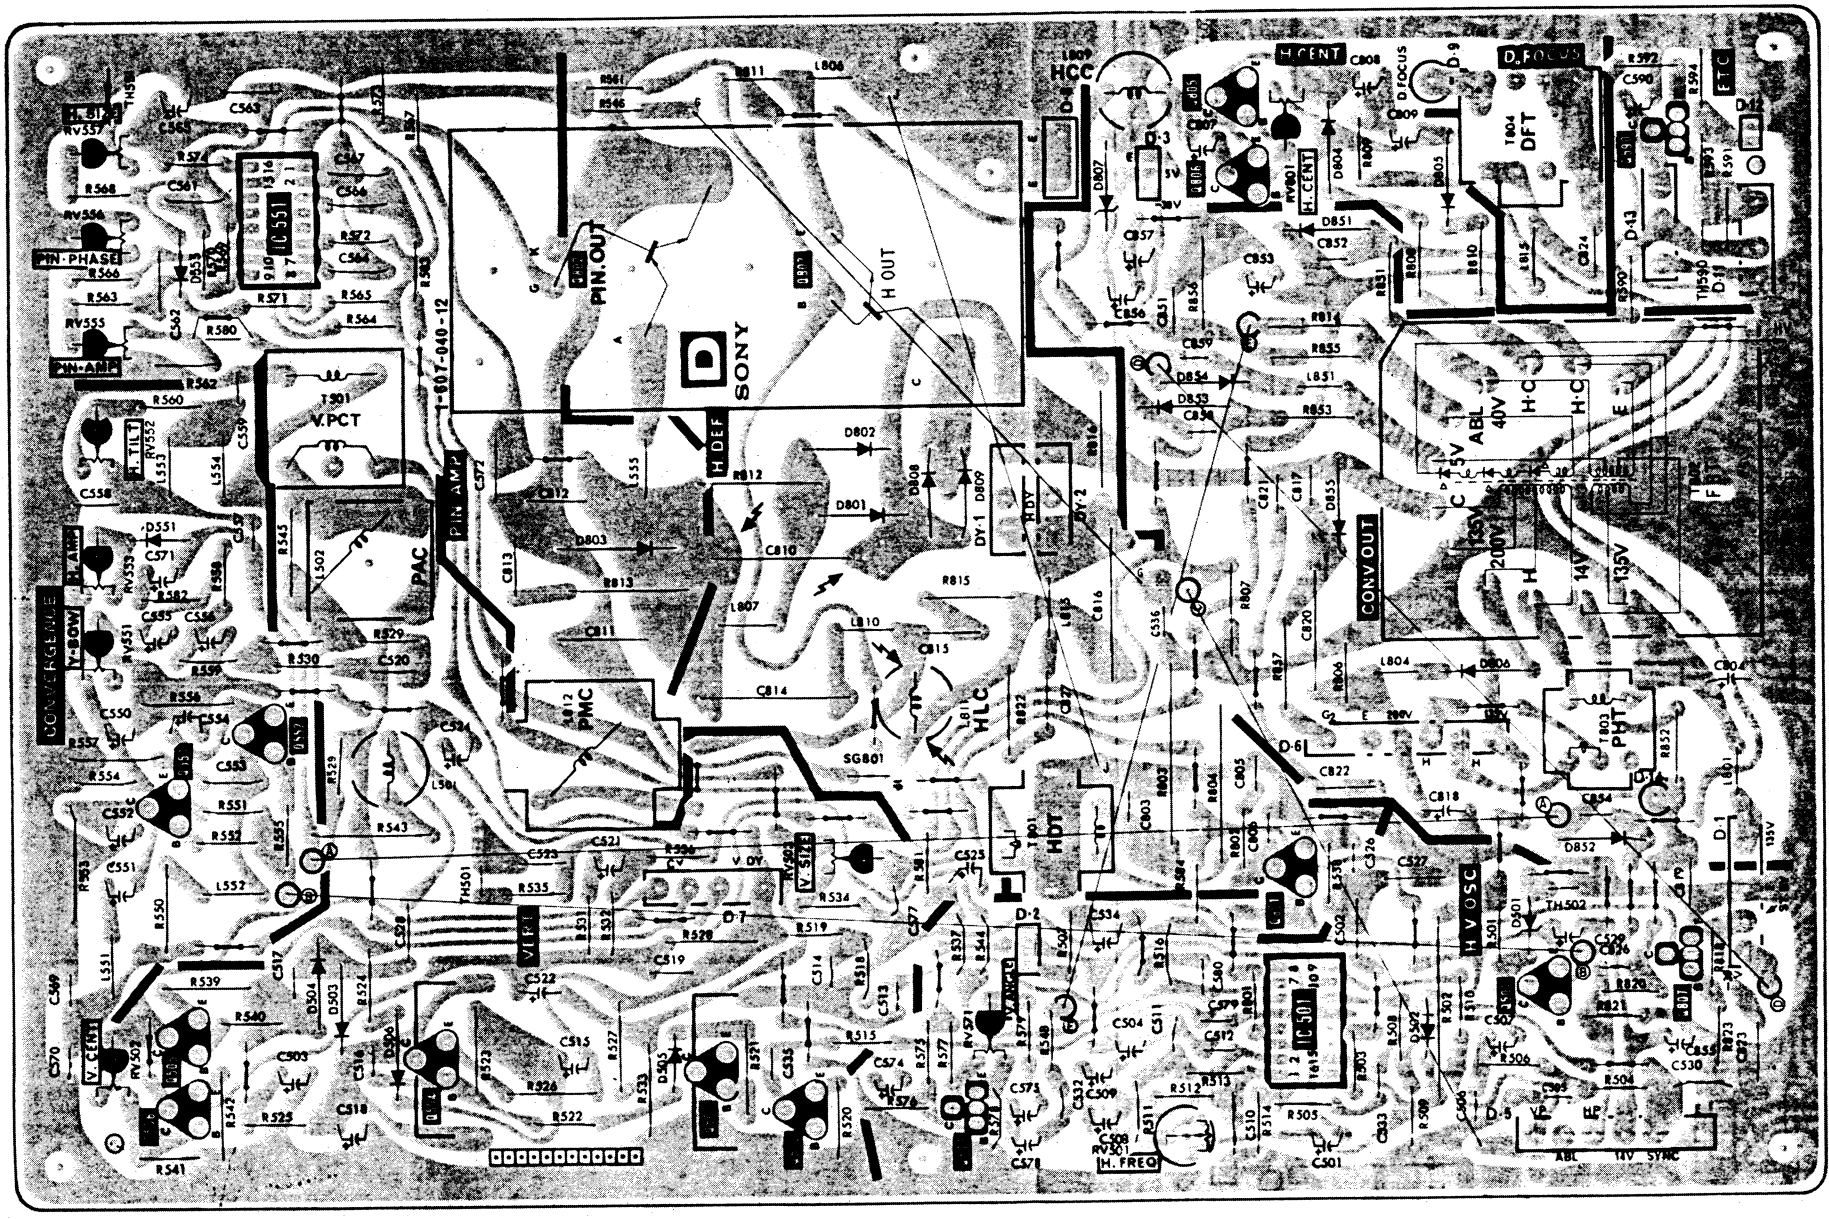

Q, IC	D	ADJ
805		RV801
		RV557
806	807 805	
IC551	851	RV556
802 803	553	
		RV555
	854	
	853	RV552
	802	
	808 809	
	801	
	551 803	RV553
		RV551
	806	
552		
551		
	852	RV503
801		
	501	
807	504	
501		
IC501	503 502	RV571
505		
504 505	506 505	RV502
506 502 571		
		RV501

Q, IC	D	ADJ

— A Board —

| | | |

VHF/UHF TUNER SCHEMATIC DIAGRAM

- **BT-883**

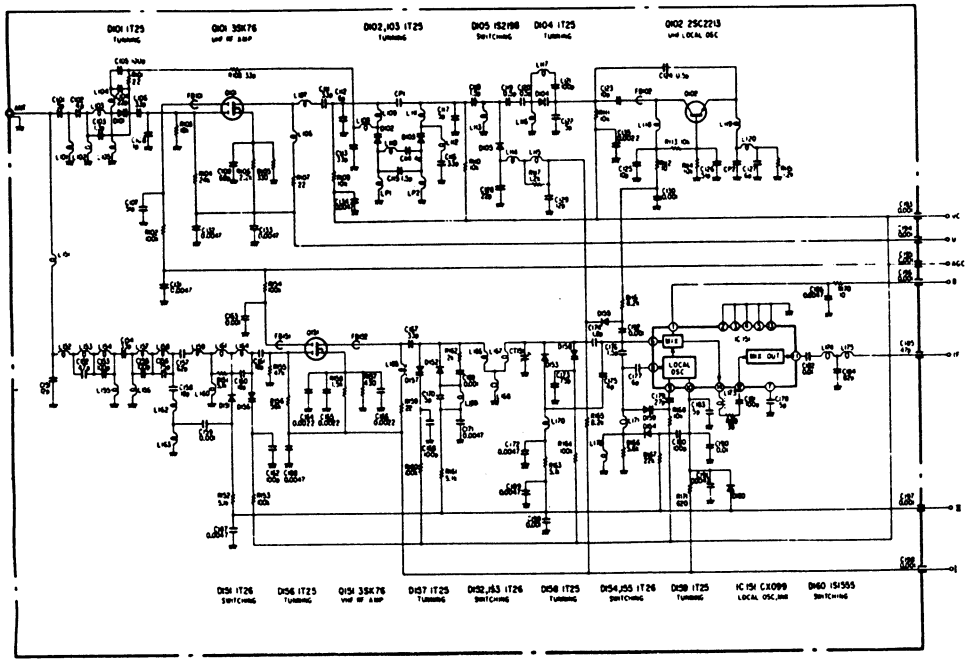

Note: Tuner reference numbers are not included in the Electrical Parts List.

EXPLODED VIEWS

NOTE:
- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " ♦ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

(1) CABINET

● : TA, BV3 x 12
▲ : TA, BV4 x 12

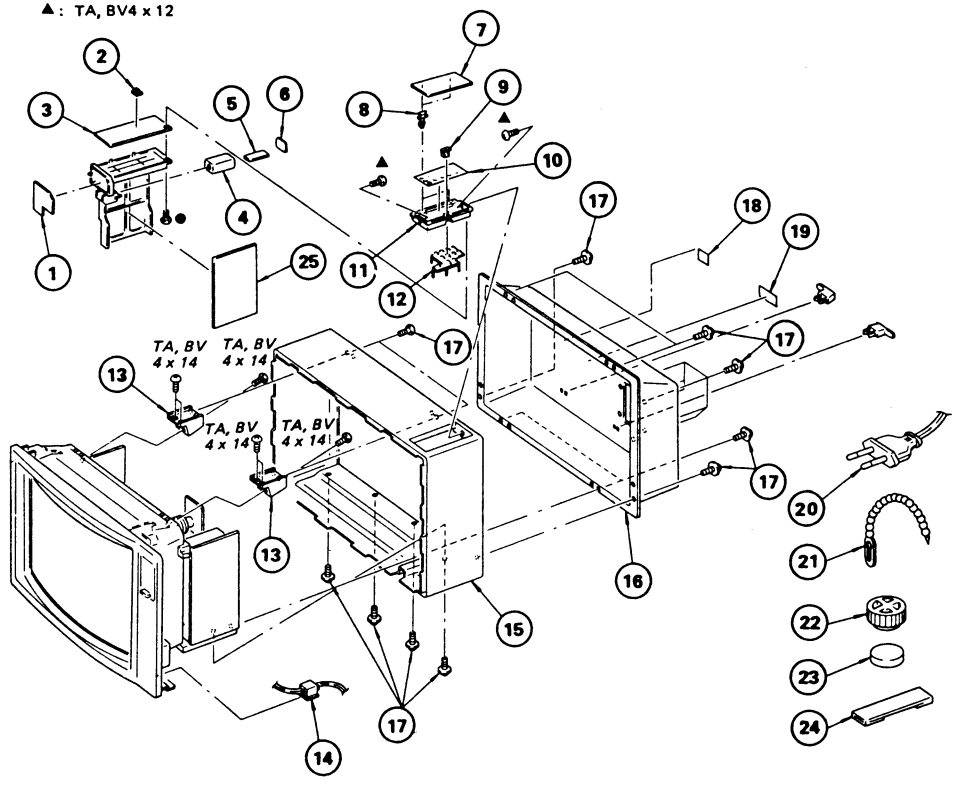

No.	Part No	Description	Remark
1	♦:1-606-474-00	H2 BOARD	
2	4-349-408-00	PUSH BUTTON	
3	♦:1-606-473-00	H1 BOARD	
4	♦:4-342-117-00	CASE, SHIELD (MAIN), R	
5	♦:1-606-794-00	N BOARD	
6	♦:4-342-118-00	LID, SHIELD CASE, R	
7	X-4356-302-2	DOOR ASSY	
8	3-703-035-11	SHAFT, LID	
9	4-352-034-00	CATCHER, PUSH	
10	4-356-321-00	PLATE, CONTROL	
11	4-356-328-01	PANEL, CONTROL	
12	4-356-322-00	BUTTON, MULTI	
13	♦:4-309-643-11	BRACKET, CABINET	

No.	Part No	Description	Remark
14	⚠:4-022-115-00	HOLDER, AC CORD	
15	X-4356-304-2	CABINET ASSY	
16	X-4356-305-2	COVER ASSY, REAR	
17	4-309-749-00	SCREW, TAPPING, +PW4X20	
18	3-703-269-00	LABEL, SEV	
19	♦:4-356-770-00	LABEL, MODEL NUMBER	
20	⚠:1-551-427-11	CORD, POWER EULO PLUG	
21	4-308-870-00	CLIP, LEAD WIRE	
22	1-452-094-00	MAGNET, ROTATABLE DISK; 15 MM ϕ	
23	1-452-032-00	MAGNET, DISK; 10 MM ϕ	
24	X-4309-608-0	PERMALLOY ASSY, CONVERGENCE	
25	♦:A-1306-208-A	M BOARD, COMPLETE	

(2) CHASSIS

● : TA, BV3 x 12
▲ : TA, BV4 x 12

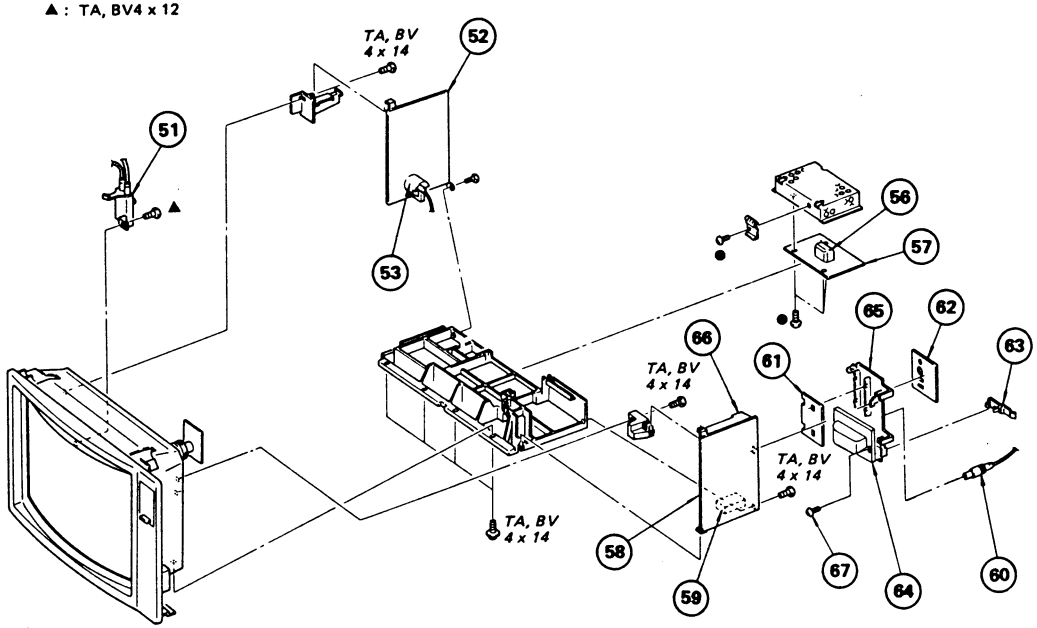

No.	Part No	Description	Remark
51	⚠1-226-733-00	RES ASSY, HIGH-VOLTAGE	
52	♦:A-1345-380-A	D BOARD, COMPLETE	
53	⚠1-439-286-00	TRANSFORMER ASSY, FLYBACK	
56	⚠1-413-092-00	SWITCHING REGULATOR	
57	♦:A-1245-159-A	F BOARD, COMPLETE	
58	♦:A-1295-609-A	A BOARD, COMPLETE	
59	⚠1-463-421-00	TUNER, (BT-883)	
60	♦:1-534-632-00	CABLE, PIN	
61	♦:1-606-475-00	J1 BOARD	
62	4-356-304-00	PLATE, CONNECTOR	
63	4-329-127-00	CLAMP, CORD	
64	⚠1-536-683-00	CONNECTOR, COAXIAL ANTENNA	
65	4-356-335-01	PANEL, CONNECTOR	
66	♦:4-356-307-01	HEAT SINK (A)	
67	4-304-496-00	HEAD, WASHER, TAPPING SCREW	

(3) PICTURE TUBE

● : TA, BV 3 x 12
▲ : TA, BV 4 x 12

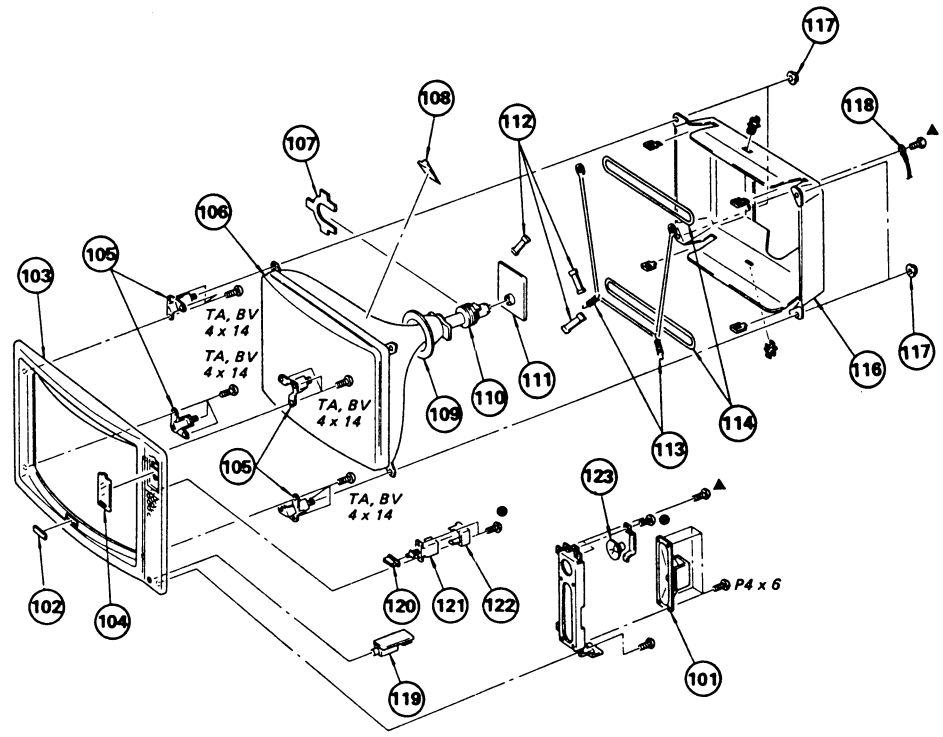

No.	Part No	Description	Remark
101	1-502-991-00	SPEAKER, CONE	
102	3-701-912-00	EMBLEM, SONY, (LARGE)	
103	X-4356-328-2	BEZEL ASSY	
104	4-356-338-00	WINDOW, ORNAMENTAL, BEZEL	
105	♦:4-318-302-00	BRACKET (H), CRT	
106	⚠8-737-606-05	PICTURE TUBE (570HB22)	
107	1-452-133-00	MAGNET	
108	3-703-003-00	SPACER, DY	
109	⚠1-451-175-21	DEFLECTION YOKE (SY-88Y)	
110	⚠1-452-099-00	PICTURE TUBE NECK ASSY	
111	♦:A-1330-351-A	C BOARD, COMPLETE	
112	1-452-185-21	COIL ASSY, ETC	
113	4-303-774-XX	SPRING	
114	⚠1-426-042-21	COIL, DEGAUSSING	
116	♦:4-323-920-00	SHIELD, CRT	
117	4-306-034-00	FLANGE NUT, (B) 5MM	
118	♦:1-535-283-11	TERMINAL, EARTH	
119	♦:1-606-476-00	J2 BOARD	
120	4-342-505-00	BUTTON, POWER	
121	⚠1-553-225-00	SWITCH, PUSH (POWER)	
123	1-503-116-00	SPEAKER	

ELECTRICAL PARTS LIST

NOTE:

- =>: Due to standardization, interchangeable replacements may be substituted for parts specified in the diagrams.
- Items marked " ♦ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

CAPACITORS
- MF : μF, PF : μμF

RESISTORS
- All resistors are in ohms
- F : nonflammable

COILS
- MMH : mH, UH : μH

No.	Part No	Description				Remark
	♦:A-1245-159-A	F BOARD, COMPLETE				
		**********				
	3-701-353-00	SPACER, MICA				
	3-701-609-00	BUSHING (B), TR				
	♦:4-314-938-01	RETAINER (TO-3), TRANSISTOR				
	♦:4-336-010-00	HEAT SINK				
	♦:4-356-301-00	HEAT SINK (D)				
		CAPACITOR				
C601	⚠.1-108-745-00	MYLAR	0.22MF	20%	300V	
C602	⚠.1-108-747-00	MYLAR	0.1MF	20%	300V	
C603	1-102-085-00	CERAMIC	0.0047MF		500V	
C604	1-102-085-00	CERAMIC	0.0047MF		500V	
C605	1-102-085-00	CERAMIC	0.0047MF		500V	
C606	⚠.1-161-738-00	CERAMIC	0.0047MF	20%	400V	
C607	⚠.1-161-953-00	FILM	0.0047MF	20%	400V	
C608	⚠.1-161-953-00	FILM	0.0047MF	20%	400V	
C609	⚠.1-161-738-00	CERAMIC	0.0047MF	20%	400V	
C610	1-129-901-00	FILM	0.0022MF	10%	1KV	
C611	1-123-335-00	ELECT	330MF	20%	25V	
C612	1-123-388-00	ELECT	100MF	20%	100V	
C613	1-108-376-00	MYLAR	0.0082MF	10%	100V	
C614	1-102-959-00	CERAMIC	22PF	5%	50V	
C615	1-123-380-00	ELECT	1MF	20%	50V	
C616	1-123-381-00	ELECT	2.2MF	20%	50V	
C617	1-108-373-00	MYLAR	0.0047MF	10%	100V	
C618	1-125-167-00	ELECT(BLOCK)	250MF		400V	
C619	1-102-327-00	CERAMIC	330PF	15%	1.5KV	
C621	1-102-074-00	CERAMIC	0.001MF	10%	50V	
C622	1-123-356-00	ELECT	10MF	20%	50V	
C651	1-102-327-00	CERAMIC	330PF	15%	1.5KV	
C652	1-123-263-00	ELECT	33MF	20%	250V	
C653	1-123-263-00	ELECT	33MF	20%	250V	
C654	1-102-030-00	CERAMIC	330PF	10%	500V	
C655	1-123-333-00	ELECT	100MF	20%	25V	
C656	1-102-030-00	CERAMIC	330PF	10%	500V	
C657	1-102-095-00	CERAMIC	330PF	20%	1KV	
C658	1-123-350-00	ELECT	2200MF	20%	35V	
C660	1-123-364-00	ELECT	1000MF	20%	50V	
		DIODE				
D601	8-719-503-06	DIODE S3WB60Z				
D605	=>8-719-200-02	DIODE 10E2				
D606	8-719-100-60	DIODE RD11E-B1				
D607	=>8-719-200-02	DIODE 10E2				
D608	=>8-719-300-76	DIODE RH1A				
D609	=>8-719-300-76	DIODE RH1A				
D610	8-719-911-19	DIODE 1SS119				
D611	=>8-719-924-06	DIODE ERC24-06S				
D613	=>8-719-200-02	DIODE 10E2				
D614	8-719-931-17	DIODE EQB01-17				
D651	=>8-719-928-08	DIODE ERD29-08				
D652	=>8-719-924-06	DIODE ERC24-06S				
D654	=>8-719-982-04	DIODE ERB81-004				
D655	=>8-719-900-26	DIODE ERD29-08J				
D658	=>8-719-930-12	DIODE EQB01-12Z				
		CONNECTOR				
F1	1-506-348-XX	3P PLUG (L)				
F2	1-508-765-00	3P PLUG (M)				
F3	♦:1-508-786-00	2P PLUG (M)				
F4	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P				
F5	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
F6	♦:1-508-766-00	4P PLUG (M)				
F7	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM PITCH)				
F9	♦:1-508-784-00	1P PLUG				
		FUSE				
F601	⚠.1-532-237-00	FUSE, TIME-LAG T3.15A				
	♦:1-533-087-00	HOLDER, FUSE, F601				
		IC				
IC601	8-759-046-00	IC TDA4600				
		COIL				
L601	1-408-225-00	MICRO INDUCTOR 3.3UH				
L651	1-425-613-00	COIL, AIR-CORE, QF TYPE				
L652	1-459-215-00	CORE COIL 120UH				
L654	1-425-613-00	COIL, AIR-CORE, QF TYPE				
		TRANSISTOR				
Q601	8-719-000-28	THYRISTOR CR02AM-8				
Q602	=>8-729-341-34	TRANSISTOR 2SC1413A				
		RESISTOR				
R601	⚠.1-217-328-00	WIREWOUND	2.7	10%	7W	F
R602	1-213-143-00	METAL	1K	5%	1W	F
R603	1-244-935-00	CARBON	390K	5%	1/2W	
R604	1-212-355-00	METAL	0.39	5%	1W	F
R605	1-246-489-00	CARBON	4.7K	5%	1/4W	
R606	1-244-935-00	CARBON	390K	5%	1/2W	
R607	1-244-923-00	CARBON	120K	5%	1/2W	
R608	1-246-501-00	CARBON	15K	5%	1/4W	
R609	1-246-497-00	CARBON	10K	5%	1/4W	
R610	1-246-475-00	CARBON	1.2K	5%	1/4W	
R611	1-246-457-00	CARBON	220	5%	1/4W	
R612	1-246-492-00	CARBON	6.2K	5%	1/4W	
R613	1-246-479-00	CARBON	1.8K	5%	1/4W	
R614	1-213-126-00	METAL	39	5%	1W	F
R615	1-247-031-00	CARBON	27	5%	1/8W	F
R616	1-217-268-00	WIREWOUND	39	10%	3W	F
R617	⚠.1-247-687-00	CARBON	6.8M	5%	1W	
R618	1-244-925-00	CARBON	150K	5%	1/2W	
R619	1-202-637-00	COMPOSITION	470K	10%	1/2W	
R621	1-246-529-00	CARBON	220K	5%	1/4W	
R622	⚠.1-247-687-00	CARBON	6.8M	5%	1W	
R650	1-213-161-00	METAL	33K	5%	1W	F
R655	1-213-143-00	METAL	1K	5%	1W	F
R656	1-212-875-00	FUSIBLE	56	5%	1/4W	F
R661	1-217-602-00	FUSIBLE	4.7	5%	2W	
R662	1-246-459-00	CARBON	270	5%	1/4W	
R663	1-213-158-00	METAL	18K	5%	1W	F
R664	1-207-451-00	WIREWOUND	0.1	10%	1/2W	
R665	1-247-020-00	CARBON	1	5%	1/8W	F
		VARIABLE RESISTOR				
RV601	1-226-849-00	RES, ADJ, CARBON 3.3K				
		TRANSFORMER				
T601	⚠.1-421-352-00	TRANSFORMER, FERRITE				
T602	⚠.1-421-412-00	COIL, FERRITE				
T603	⚠.1-413-092-00	SWITCHING REGULATOR; SRT				
T651	1-421-357-31	TRANSFORMER, LINE FILTER				
		THERMISTOR				
THP601	⚠.1-806-165-00	THERMISTOR (POSITIVE)				
THP602	⚠.1-806-449-21	THERMISTOR (POSITIVE)				
		**********				
	♦:A-1295-609-A	A BOARD, COMPLETE				
		**********				
	♦:4-314-969-00	CASE (A) MAIN, SHIELD				
	4-327-002-00	REG HOLD				
	♦:4-336-030-00	CASE (MAIN), SHIELD, VIF				
	♦:4-356-303-00	CASE (UPPER), SHIELD, SIF				
	♦:4-356-306-00	CASE (LOWER), SHIELD, SIF				
	♦:4-356-307-00	HEAT SINK (A)				
	♦:4-356-316-00	CASE (UPPER), SHIELD, VIF				
	♦:4-356-327-00	CASE (LOWER), SHIELD, VIF				
		CONNECTOR				
A1	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P				
A2	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P				
A3	♦:1-508-768-00	6P PLUG				
A4	♦:1-560-125-00	PLUG, CONNECTOR (2.5MM) 5P				
A5	♦:1-560-125-00	PLUG, CONNECTOR (2.5MM) 5P				
A6	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P				
A7	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
A8	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P				
A9	♦:1-560-125-00	PLUG, CONNECTOR (2.5MM) 5P				
A11	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
A12	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
A14	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)				
A15	♦:1-560-127-00	PLUG, CONNECTOR (2.5MM PITCH)				
A16	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)				
A17	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM PITCH)				
A18	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)				
A19	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)				
A20	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM PITCH)				
A21	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM PITCH)				
A22	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)				
A23	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)				
A24	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM PITCH)				
		CAPACITOR				
C201	1-108-387-00	MYLAR	0.068MF	10%	100V	
C202	1-108-387-00	MYLAR	0.068MF	10%	100V	
C203	1-161-265-00	CERAMIC	33PF	5%	50V	
C204	1-123-318-00	ELECT	33MF	20%	16V	
C205	1-108-389-00	MYLAR	0.1MF	10%	100V	
C206	1-123-356-00	ELECT	10MF	20%	16V	
C207	1-108-390-00	MYLAR	0.12MF	10%	100V	
C208	1-123-356-00	ELECT	10MF	20%	16V	
C209	1-123-318-00	ELECT	33MF	20%	16V	
C210	1-123-380-00	ELECT	1MF	20%	50V	
C211	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C212	1-102-529-00	CERAMIC	100PF	5%	50V	
C213	1-102-527-00	CERAMIC	82PF	5%	50V	
C214	1-161-258-00	CERAMIC	8.2PF	10%	50V	
C215	1-102-523-00	CERAMIC	56PF	5%	50V	
C216	1-102-529-00	CERAMIC	100PF	5%	50V	
C217	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C218	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C219	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C220	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C221	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C222	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C223	1-123-379-00	ELECT	0.47MF	20%	50V	
C224	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C225	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C226	1-123-318-00	ELECT	33MF	20%	16V	
C227	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C230	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C231	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C232	1-161-254-00	CERAMIC	3.9PF	10%	50V	
C233	1-161-254-00	CERAMIC	3.9PF	10%	50V	
C234	1-161-285-00	CERAMIC	33PF	5%	50V	
C235	1-102-529-00	CERAMIC	100PF	5%	50V	
C236	1-102-527-00	CERAMIC	82PF	5%	50V	
C237	1-161-285-00	CERAMIC	33PF	5%	50V	
C238	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C239	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C240	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C241	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C242	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C243	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C245	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C246	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C247	1-123-356-00	ELECT	10MF	20%	25V	
C248	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C249	1-161-279-00	CERAMIC	10PF	5%	50V	

No.	Part No	Description				Remark
C251	1-108-377-00	MYLAR	0.01MF	10%	100V	
C252	1-161-279-00	CERAMIC	10PF	5%	50V	
C254	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C255	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C257	1-161-263-00	CERAMIC	22PF	5%	50V	
C258	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C259	1-123-318-00	ELECT	33MF	20%	16V	
C260	1-123-356-00	ELECT	10MF	20%	25V	
C262	1-123-382-00	ELECT	3.3MF	20%	50V	
C263	1-123-382-00	ELECT	3.3MF	20%	50V	
C264	1-123-382-00	ELECT	3.3MF	20%	50V	
C265	1-123-382-00	ELECT	3.3MF	20%	50V	
C266	1-123-332-00	ELECT	47MF	20%	16V	
C267	1-108-373-00	MYLAR	0.0047MF	10%	100V	
C268	1-108-390-00	MYLAR	0.12MF	10%	100V	
C269	1-108-373-00	MYLAR	0.0047MF	10%	100V	
C270	1-108-390-00	MYLAR	0.12MF	10%	100V	
C271	1-123-356-00	ELECT	10MF	20%	16V	
C272	1-123-356-00	ELECT	10MF	20%	16V	
C273	1-123-356-00	ELECT	10MF	20%	16V	
C274	1-123-380-00	ELECT	1MF	20%	50V	
C275	1-123-332-00	ELECT	47MF	20%	16V	
C276	1-123-333-00	ELECT	100MF	20%	16V	
C277	1-161-271-00	CERAMIC	100PF	5%	50V	
C278	1-161-271-00	CERAMIC	100PF	5%	50V	
C279	1-108-389-00	MYLAR	0.1MF	10%	100V	
C280	1-123-330-00	ELECT	22MF	20%	25V	
C281	1-123-356-00	ELECT	10MF	20%	25V	
C282	1-123-356-00	ELECT	10MF	20%	25V	
C284	1-161-313-00	CERAMIC	150PF	10%	50V	
C285	1-161-316-00	CERAMIC	270PF	10%	50V	
C286	1-108-375-00	MYLAR	0.0068MF	10%	100V	
C287	1-108-389-00	MYLAR	0.1MF	10%	100V	
C288	1-123-364-00	ELECT	1000MF	20%	50V	
C289	1-123-364-00	ELECT	1000MF	20%	50V	
C290	1-123-361-00	ELECT	220MF	20%	50V	
C291	1-123-333-00	ELECT	100MF	20%	16V	
C292	1-123-333-00	ELECT	100MF	20%	16V	
C293	1-123-333-00	ELECT	100MF	20%	16V	
C294	1-123-318-00	ELECT	33MF	20%	16V	
C295	1-123-318-00	ELECT	33MF	20%	16V	
C296	1-123-330-00	ELECT	22MF	20%	25V	
C297	1-161-328-21	CERAMIC	0.0047MF	30%	50V	
C299	1-101-004-00	CERAMIC	0.01MF		50V	
C301	1-161-267-00	CERAMIC	47PF	5%	50V	
C302	1-102-678-00	CERAMIC	100PF	5%	50V	
C303	1-102-850-00	CERAMIC	56PF	5%	50V	
C304	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C305	1-161-265-00	CERAMIC	33PF	5%	50V	
C306	1-123-356-00	ELECT	10MF	20%	16V	
C307	1-123-380-00	ELECT	1MF	20%	50V	
C308	1-108-383-00	MYLAR	0.033MF	10%	100V	
C309	1-108-369-00	MYLAR	0.0022MF	10%	100V	
C310	1-161-319-00	CERAMIC	470PF	10%	50V	
C311	1-161-319-00	CERAMIC	470PF	10%	50V	
C313	1-123-379-00	ELECT	0.47MF	20%	50V	
C314	1-123-382-00	ELECT	3.3MF	20%	50V	
C315	1-123-380-00	ELECT	1MF	20%	50V	
C316	1-108-389-00	MYLAR	0.1MF	10%	100V	
C317	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C318	1-123-380-00	ELECT	1MF	20%	50V	
C319	1-123-318-00	ELECT	33MF	20%	16V	
C320	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C321	1-123-382-00	ELECT	3.3MF	20%	50V	
C322	1-123-380-00	ELECT	1MF	20%	50V	
C325	1-161-269-00	CERAMIC	68PF	5%	50V	
C326	1-102-525-00	CERAMIC	68PF	5%	50V	
C327	1-161-262-00	CERAMIC	18PF	5%	50V	
C328	1-108-385-00	MYLAR	0.047MF	10%	100V	
C329	1-108-385-00	MYLAR	0.047MF	10%	100V	
C330	1-123-379-00	ELECT	0.47MF	20%	50V	
C331	1-161-271-00	CERAMIC	100PF	5%	50V	
C332	1-161-270-00	CERAMIC	82PF	5%	50V	
C333	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C334	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C335	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C337	1-161-269-00	CERAMIC	68PF	5%	50V	
C338	1-123-356-00	ELECT	10MF	20%	25V	
C340	1-123-318-00	ELECT	33MF	20%	16V	
C341	1-123-318-00	ELECT	33MF	20%	16V	
C342	1-123-333-00	ELECT	100MF	20%	16V	
C343	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C382	1-123-297-00	ELECT	330MF	20%	6.3V	
C383	1-123-297-00	ELECT	330MF	20%	6.3V	
C384	1-161-313-00	CERAMIC	150PF	10%	50V	
C385	1-123-330-00	ELECT	22MF	20%	16V	
C386	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C389	1-161-379-00	CERAMIC	0.01MF	20%	25V	
C390	1-161-315-00	CERAMIC	220PF	10%	50V	

FILTER

CD201	1-404-380-00	DISCRIMINATOR, CERAMIC 5.5MHZ	
CF201	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF203	1-527-840-00	FILTER, CERAMIC	
CF301	1-409-332-00	CERAMIC TRAP (4.5MHZ)	

DIODE

D202	⇒8-719-911-19	DIODE 1SS119	
D203	⇒8-719-100-58	DIODE RD10E-B3	
D205	⇒8-719-911-19	DIODE 1SS119	
D206	8-719-026-11	DIODE 1T261	
D207	8-719-102-79	DIODE RD6.8E-N3	
D208	⇒8-719-911-19	DIODE 1SS119	
D291	⇒8-719-100-68	DIODE RD13E-B2	
D301	⇒8-719-911-19	DIODE 1SS119	
D302	⇒8-719-911-19	DIODE 1SS119	
D303	⇒8-719-911-19	DIODE 1SS119	
D304	⇒8-719-143-07	DIODE RD4.3E-B	
D381	8-719-026-11	DIODE 1T261	

DELAY LINE

DL301	1-415-274-00	DELAY LINE, Y
DL302	1-415-131-00	DELAY LINE (1H)

IC

IC201	8-759-276-07	IC TA7607AP
IC202	8-759-028-40	IC TDA2840
IC203	8-759-193-91	IC UPC1391H
IC204	8-759-276-30	IC TA7630P
IC205	8-759-272-10	IC TA7210P
IC206	8-759-140-53	IC UPD4053BC
IC301	8-759-113-65	IC UPC1365C

COIL

L202	1-404-068-00	COIL, VIF	
L203	1-404-068-00	COIL, VIF	
L204	1-407-681-00	MICRO INDUCTOR 1UH	
L205	1-404-207-00	COIL, VIF	
L207	1-407-693-00	MICRO INDUCTOR 10UH	
L208	1-407-690-00	MICRO INDUCTOR 5.6UH	
L209	1-404-203-00	COIL, VIF	
L210	1-404-203-00	COIL, VIF	
L211	1-404-381-00	COIL, VIF	
L212	1-407-690-00	MICRO INDUCTOR 5.6UH	
L213	1-404-207-00	COIL, VIF	
L215	1-404-378-00	I.F.T	
L216	1-407-697-00	MICRO INDUCTOR 22UH	
L217	1-407-690-00	MICRO INDUCTOR 5.6UH	
L218	1-407-690-00	MICRO INDUCTOR 5.6UH	
L301	1-407-695-00	MICRO INDUCTOR 15UH	
L302	1-407-690-00	MICRO INDUCTOR 5.6UH	
L303	1-407-693-00	MICRO INDUCTOR 10UH	
L304	1-408-160-00	MICRO INDUCTOR 15MMH	
L305	1-407-691-00	MICRO INDUCTOR 6.8UH	
L306	1-407-697-00	MICRO INDUCTOR 22UH	
L307	1-407-694-00	MICRO INDUCTOR 12UH	
L308	1-407-570-00	COIL, VARIABLE 15MH	
L309	1-407-570-00	COIL, VARIABLE 15MH	

TRANSISTOR

Q201	8-729-178-54	TRANSISTOR 2SC2785	
Q202	⇒8-765-300-00	TRANSISTOR 2SC2009	
Q203	8-729-117-54	TRANSISTOR 2SA1175	
Q204	⇒8-765-300-00	TRANSISTOR 2SC2009	
Q205	8-729-178-54	TRANSISTOR 2SC2785	
Q206	8-729-178-54	TRANSISTOR 2SC2785	
Q207	8-729-178-54	TRANSISTOR 2SC2785	
Q208	8-729-117-54	TRANSISTOR 2SA1175	
Q209	8-729-178-54	TRANSISTOR 2SC2785	
Q291	8-729-831-33	TRANSISTOR 2SD313HP	
Q301	8-729-178-54	TRANSISTOR 2SC2785	
Q302	8-729-178-54	TRANSISTOR 2SC2785	
Q303	8-729-117-54	TRANSISTOR 2SA1175	
Q304	8-729-178-54	TRANSISTOR 2SC2785	
Q306	8-729-178-54	TRANSISTOR 2SC2785	
Q310	8-729-117-54	TRANSISTOR 2SA1175	
Q382	8-729-178-54	TRANSISTOR 2SC2785	
Q383	8-729-178-54	TRANSISTOR 2SC2785	

RESISTOR

R201	1-246-505-00	CARBON	22K	5%	1/4W
R202	1-246-533-00	CARBON	330K	5%	1/4W
R204	1-246-481-00	CARBON	2.2K	5%	1/4W
R205	1-246-481-00	CARBON	2.2K	5%	1/4W
R207	1-246-489-00	CARBON	4.7K	5%	1/4W
R208	1-246-487-00	CARBON	3.9K	5%	1/4W
R209	1-246-457-00	CARBON	220	5%	1/4W
R210	1-246-457-00	CARBON	220	5%	1/4W
R212	1-246-479-00	CARBON	1.8K	5%	1/4W
R213	1-246-483-00	CARBON	2.7K	5%	1/4W
R214	1-246-477-00	CARBON	1.5K	5%	1/4W
R215	1-246-543-00	CARBON	820K	5%	1/4W
R216	1-246-473-00	CARBON	1K	5%	1/4W
R217	1-246-455-00	CARBON	180	5%	1/4W
R218	1-246-449-00	CARBON	100	5%	1/4W
R219	1-246-473-00	CARBON	1K	5%	1/4W
R221	1-246-473-00	CARBON	1K	5%	1/4W
R223	1-246-509-00	CARBON	33K	5%	1/4W
R224	1-246-519-00	CARBON	82K	5%	1/4W
R225	1-246-449-00	CARBON	100	5%	1/4W
R226	1-246-489-00	CARBON	4.7K	5%	1/4W
R227	1-246-487-00	CARBON	3.9K	5%	1/4W
R228	1-246-475-00	CARBON	1.2K	5%	1/4W
R229	1-246-457-00	CARBON	220	5%	1/4W
R231	1-246-461-00	CARBON	330	5%	1/4W
R232	1-246-465-00	CARBON	470	5%	1/4W
R233	1-246-783-00	CARBON	1K		1/8W
R234	1-246-459-00	CARBON	270	5%	1/4W
R235	1-246-463-00	CARBON	390	5%	1/4W
R236	1-246-473-00	CARBON	1K	5%	1/4W
R239	1-246-461-00	CARBON	330	5%	1/4W
R241	1-246-461-00	CARBON	330	5%	1/4W
R243	1-246-461-00	CARBON	330	5%	1/4W
R245	1-246-461-00	CARBON	330	5%	1/4W
R246	1-246-527-00	CARBON	180K	5%	1/4W
R247	1-246-489-00	CARBON	4.7K	5%	1/4W
R248	1-246-509-00	CARBON	33K	5%	1/4W
R251	1-246-521-00	CARBON	100K	5%	1/4W
R252	1-246-521-00	CARBON	100K	5%	1/4W
R253	1-246-497-00	CARBON	10K	5%	1/4W
R254	1-246-497-00	CARBON	10K	5%	1/4W

A

No.	Part No	Description				Remark
R256	1-246-497-00	CARBON	10K	5%	1/4W	
R257	1-246-497-00	CARBON	10K	5%	1/4W	
R259	1-246-473-00	CARBON	1K	5%	1/4W	
R260	1-246-473-00	CARBON	1K	5%	1/4W	
R261	1-246-477-00	CARBON	1.5K	5%	1/4W	
R262	1-246-477-00	CARBON	1.5K	5%	1/4W	
R263	1-246-497-00	CARBON	10K	5%	1/4W	
R264	1-246-497-00	CARBON	10K	5%	1/4W	
R265	1-246-489-00	CARBON	4.7K	5%	1/4W	
R266	1-246-489-00	CARBON	4.7K	5%	1/4W	
R267	1-246-521-00	CARBON	100K	5%	1/4W	
R268	1-246-497-00	CARBON	10K	5%	1/4W	
R269	1-246-481-00	CARBON	2.2K	5%	1/4W	
R270	1-246-505-00	CARBON	22K	5%	1/4W	
R271	1-246-521-00	CARBON	100K	5%	1/4W	
R272	1-246-497-00	CARBON	10K	5%	1/4W	
R273	1-246-521-00	CARBON	100K	5%	1/4W	
R275	1-247-021-00	CARBON	1.5	5%	1/8W	F
R276	1-212-356-00	METAL	0.47	5%	1W	F
R277	1-246-449-00	CARBON	100	5%	1/4W	
R278	1-246-497-00	CARBON	10K	5%	1/4W	
R279	1-246-521-00	CARBON	100K	5%	1/4W	
R280	1-246-497-00	CARBON	10K	5%	1/4W	
R281	1-246-523-00	CARBON	120K	5%	1/4W	
R282	1-246-477-00	CARBON	1.5K	5%	1/4W	
R284	1-246-473-00	CARBON	1K	5%	1/4W	
R285	1-246-473-00	CARBON	1K	5%	1/4W	
R288	1-246-493-00	CARBON	6.8K	5%	1/4W	
R291	1-246-457-00	CARBON	220	5%	1/4W	
R302	1-246-463-00	CARBON	390	5%	1/4W	
R303	1-246-473-00	CARBON	1K	5%	1/4W	
R304	1-246-483-00	CARBON	2.7K	5%	1/4W	
R306	1-246-463-00	CARBON	390	5%	1/4W	
R307	1-246-473-00	CARBON	1K	5%	1/4W	
R308	1-246-473-00	CARBON	1K	5%	1/4W	
R309	1-246-501-00	CARBON	15K	5%	1/4W	
R310	1-246-477-00	CARBON	1.5K	5%	1/4W	
R311	1-246-473-00	CARBON	1K	5%	1/4W	
R312	1-246-477-00	CARBON	1.5K	5%	1/4W	
R313	1-246-477-00	CARBON	1.5K	5%	1/4W	
R314	1-246-449-00	CARBON	100	5%	1/4W	
R315	1-246-473-00	CARBON	1K	5%	1/4W	
R316	1-246-513-00	CARBON	47K	5%	1/4W	
R317	1-246-529-00	CARBON	220K	5%	1/4W	
R318	1-246-485-00	CARBON	3.3K	5%	1/4W	
R319	1-246-465-00	CARBON	470	5%	1/4W	
R320	1-246-495-00	CARBON	8.2K	5%	1/4W	
R322	1-246-477-00	CARBON	1.5K	5%	1/4W	
R324	1-246-465-00	CARBON	470	5%	1/4W	
R325	1-246-505-00	CARBON	22K	5%	1/4W	
R326	1-246-499-00	CARBON	12K	5%	1/4W	
R327	1-246-497-00	CARBON	10K	5%	1/4W	
R328	1-246-505-00	CARBON	22K	5%	1/4W	

No.	Part No	Description				Remark
R329	1-246-449-00	CARBON	100	5%	1/4W	
R331	1-246-529-00	CARBON	220K	5%	1/4W	
R332	1-246-481-00	CARBON	2.2K	5%	1/4W	
R333	1-246-489-00	CARBON	4.7K	5%	1/4W	
R334	1-246-519-00	CARBON	82K	5%	1/4W	
R335	1-246-499-00	CARBON	12K	5%	1/4W	
R336	1-246-495-00	CARBON	8.2K	5%	1/4W	
R337	1-246-473-00	CARBON	1K	5%	1/4W	
R338	1-246-485-00	CARBON	3.3K	5%	1/4W	
R347	1-246-489-00	CARBON	4.7K	5%	1/4W	
R348	1-246-489-00	CARBON	4.7K	5%	1/4W	
R349	1-246-473-00	CARBON	1K	5%	1/4W	
R351	1-246-473-00	CARBON	1K	5%	1/4W	
R352	1-246-497-00	CARBON	10K	5%	1/4W	
R353	1-246-495-00	CARBON	8.2K	5%	1/4W	
R354	1-246-449-00	CARBON	100	5%	1/4W	
R355	1-246-457-00	CARBON	220	5%	1/4W	
R356	1-246-457-00	CARBON	220	5%	1/4W	
R357	1-246-467-00	CARBON	560	5%	1/4W	
R358	1-246-469-00	CARBON	680	5%	1/4W	
R359	1-246-507-00	CARBON	27K	5%	1/4W	
R360	1-246-507-00	CARBON	27K	5%	1/4W	
R361	1-246-481-00	CARBON	2.2K	5%	1/4W	
R362	1-246-471-00	CARBON	820	5%	1/4W	
R363	1-246-473-00	CARBON	1K	5%	1/4W	
R364	1-246-457-00	CARBON	220	5%	1/4W	
R365	1-246-485-00	CARBON	3.3K	5%	1/4W	
R366	1-246-457-00	CARBON	220	5%	1/4W	
R367	1-246-485-00	CARBON	3.3K	5%	1/4W	
R368	1-246-457-00	CARBON	220	5%	1/4W	
R369	1-246-485-00	CARBON	3.3K	5%	1/4W	
R370	1-246-449-00	CARBON	100	5%	1/4W	
R371	1-246-449-00	CARBON	100	5%	1/4W	
R375	1-246-477-00	CARBON	1.5K	5%	1/4W	
R376	1-246-477-00	CARBON	1.5K	5%	1/4W	
R377	1-246-503-00	CARBON	18K	5%	1/4W	
R378	1-246-511-00	CARBON	39K	5%	1/4W	
R387	1-246-449-00	CARBON	100	5%	1/4W	
R388	1-246-497-00	CARBON	10K	5%	1/4W	
R389	1-246-461-00	CARBON	330	5%	1/4W	
R390	1-246-461-00	CARBON	330	5%	1/4W	
R391	1-246-493-00	CARBON	6.8K	5%	1/4W	
R392	1-246-507-00	CARBON	27K	5%	1/4W	
R393	1-246-475-00	CARBON	1.2K	5%	1/4W	
R394	1-246-497-00	CARBON	10K	5%	1/4W	
R395	1-246-509-00	CARBON	33K	5%	1/4W	
R396	1-246-497-00	CARBON	10K	5%	1/4W	
R397	1-246-473-00	CARBON	1K	5%	1/4W	

VARIABLE RESISTOR

RV201	1-226-850-00	RES, ADJ, CARBON 4.7K	
RV202	1-226-853-00	RES, ADJ, CARBON 47K	
RV203	1-226-853-00	RES, ADJ, CARBON 47K	
RV301	1-226-851-00	RES, ADJ, CARBON 10K	
RV302	1-226-850-00	RES, ADJ, CARBON 4.7K	
RV303	1-226-846-00	RES, ADJ, CARBON 470	
RV304	1-226-847-00	RES, ADJ, CARBON 1K	
RV305	1-226-850-00	RES, ADJ, CARBON 4.7K	

FILTER

SWF201	1-404-382-00	SAWF
	♦:4-336-029-00	PLATE, SHIELD, SWF201
SWF202	1-404-332-00	SAWF (38.9MHZ)
	♦:4-336-029-00	PLATE, SHIELD, SWF202

TRANSFORMER

T302	1-404-081-00	TRANSFOMER, DELAY ADJUST

TUNER

TU201	1-463-421-00	TUNER, (BT-883)

CRYSTAL

X301	1-527-345-00	CRYSTAL, OSC

****

	♦:A-1306-208-A	M BOARD, COMPLETE
		**********
	♦:1-526-729-00	SOCKET, IC (1.78MM PITCH) 42P
	♦:1-556-098-31	CONNECTOR ASSY (2.5MM) 12P
	♦:4-356-323-00	CASE (UPPER), SHIELD, M
	♦:4-356-324-00	CASE (MAIN), SHIELD, M
	♦:4-356-325-00	CASE (LOWER), SHIELD, M

CAPACITOR

C001	1-123-380-00	ELECT	1MF	20%	50V
C002	1-161-313-00	CERAMIC	150PF	10%	50V
C003	1-161-313-00	CERAMIC	150PF	10%	50V
C004	1-123-330-00	ELECT	22MF	20%	25V
C005	1-123-382-00	ELECT	3.3MF	20%	50V
C006	1-123-382-00	ELECT	3.3MF	20%	50V
C007	1-123-382-00	ELECT	3.3MF	20%	50V
C008	1-123-380-00	ELECT	1MF	20%	50V
C009	1-123-380-00	ELECT	1MF	20%	50V
C010	1-108-389-00	MYLAR	0.1MF	10%	100V
C011	1-161-271-00	CERAMIC	100PF	5%	50V
C012	1-123-356-00	ELECT	10MF	20%	50V
C013	1-123-369-00	ELECT	4.7MF	20%	50V
C014	1-123-356-00	ELECT	10MF	20%	50V
C015	1-161-265-00	CERAMIC	33PF	5%	50V
C016	1-161-265-00	CERAMIC	33PF	5%	50V
C017	1-123-379-00	ELECT	0.47MF	20%	50V
C022	1-101-821-00	CERAMIC	0.0022MF		500V
C023	1-123-380-00	ELECT	1MF	20%	50V
C024	1-123-330-00	ELECT	22MF	20%	16V
C032	1-123-379-00	ELECT	0.47MF	20%	50V
C033	1-123-330-00	ELECT	22MF	20%	25V
C034	1-123-318-00	ELECT	33MF	20%	16V
C035	1-161-323-00	CERAMIC	0.001MF	10%	50V
C036	1-108-381-00	MYLAR	0.022MF	10%	100V
C037	1-123-610-00	ELECT	0.47MF	20%	50V
C038	1-123-611-00	ELECT	1MF	20%	50V
C039	1-123-818-00	ELECT	22MF	20%	25V

FILTER

CF001	1-527-476-00	OSCILLATOR, CERAMIC
CF002	1-527-932-00	OSCILLATOR, CERAMIC

DIODE

D001	8-759-157-40	IC UPC574J
D002	8-719-100-90	DIODE RD24E-B2
D004	=>8-719-911-19	DIODE 1SS119
D005	=>8-719-911-19	DIODE 1SS119
D006	=>8-719-911-19	DIODE 1SS119
D007	=>8-719-911-19	DIODE 1SS119
D010	=>8-719-911-19	DIODE 1SS119
D011	=>8-719-911-19	DIODE 1SS119
D012	8-719-102-90	DIODE RD10E-N2
D013	=>8-719-911-19	DIODE 1SS119
D015	=>8-719-911-19	DIODE 1SS119
D016	=>8-719-911-19	DIODE 1SS119
D017	=>8-719-911-19	DIODE 1SS119
D022	=>8-719-911-19	DIODE 1SS119
D023	=>8-719-911-19	DIODE 1SS119

IC

IC001	8-759-600-03	IC M50120P
IC002	8-759-600-16	IC M5G1400P
IC003	8-759-600-17	IC M50118P
IC004	8-759-600-15	IC M54750L
IC010	8-759-340-11	IC HD14011BP

COIL

L001	1-407-192-XX	MICRO INDUCTOR 560UH
L002	1-407-717-00	MICRO INDUCTOR 1MMH
L003	1-408-247-00	MICRO INDUCTOR 33MMH
L004	1-407-177-XX	MICRO INDUCTOR 470UH

CONNECTOR

M1	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P
M2	♦:1-508-784-00	1P PLUG
M3	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P
M4	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P
M5	♦:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P
M6	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P
M7	♦:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P
M8	♦:1-560-125-00	PLUG, CONNECTOR (2.5MM) 5P
M9	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P
M10	♦:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P

No.	Part No	Description				Remark
M11	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
M12	♣:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P				
M13	♣:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P				
M14	♣:1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P				
M15	♣:1-560-125-00	PLUG, CONNECTOR (2.5MM) 5P				
M16	♣:1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P				
M17	♣:1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)				
M18	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P				
M19	♣:1-560-156-00	PLUG, CONNECTOR (2.5MM PITCH)				
M20	♣:1-560-125-00	PLUG, CONNECTOR (2.5MM) 5P				
		TRANSISTOR				
Q001	8-729-117-54	TRANSISTOR 2SA1175				
Q002	=>8-729-603-50	TRANSISTOR 2SC403SP				
Q003	8-729-178-54	TRANSISTOR 2SC2785				
Q004	8-729-178-54	TRANSISTOR 2SC2785				
Q005	8-729-178-54	TRANSISTOR 2SC2785				
Q006	8-729-117-52	TRANSISTOR 2SA1175				
Q007	8-729-117-54	TRANSISTOR 2SA1175				
Q008	8-729-178-54	TRANSISTOR 2SC2785				
Q009	8-729-117-54	TRANSISTOR 2SA1175				
Q010	8-729-178-56	TRANSISTOR 2SC2785				
Q011	8-729-178-54	TRANSISTOR 2SC2785				
Q012	8-729-117-54	TRANSISTOR 2SA1175				
Q013	8-729-178-54	TRANSISTOR 2SC2785				
Q014	8-769-200-20	TRANSISTOR 2SK107-2				
Q015	8-729-178-54	TRANSISTOR 2SC2785				
Q016	8-729-178-54	TRANSISTOR 2SC2785				
Q020	8-729-178-54	TRANSISTOR 2SC2785				
		RESISTOR				
R001	1-246-497-00	CARBON	10K	5%	1/4W	
R003	1-246-505-00	CARBON	22K	5%	1/4W	
R004	1-246-513-00	CARBON	47K	5%	1/4W	
R005	1-246-505-00	CARBON	22K	5%	1/4W	
R006	1-246-495-00	CARBON	8.2K	5%	1/4W	
R007	1-246-481-00	CARBON	2.2K	5%	1/4W	
R008	1-246-505-00	CARBON	22K	5%	1/4W	
R009	1-246-505-00	CARBON	22K	5%	1/4W	
R010	1-246-497-00	CARBON	10K	5%	1/4W	
R011	1-246-509-00	CARBON	33K	5%	1/4W	
R012	1-246-513-00	CARBON	47K	5%	1/4W	
R013	1-246-513-00	CARBON	47K	5%	1/4W	
R014	1-246-525-00	CARBON	150K	5%	1/4W	
R015	1-246-533-00	CARBON	330K	5%	1/4W	
R016	1-246-541-00	CARBON	680K	5%	1/4W	
R017	1-246-523-00	CARBON	120K	5%	1/4W	
R018	1-246-497-00	CARBON	10K	5%	1/4W	
R019	1-246-513-00	CARBON	47K	5%	1/4W	
R020	1-246-481-00	CARBON	2.2K	5%	1/4W	
R021	1-246-473-00	CARBON	1K	5%	1/4W	
R022	1-246-469-00	CARBON	680	5%	1/4W	
R023	1-246-513-00	CARBON	47K	5%	1/4W	

No.	Part No	Description				Remark
R024	1-246-521-00	CARBON	100K	5%	1/4W	
R025	1-246-521-00	CARBON	100K	5%	1/4W	
R027	1-246-513-00	CARBON	47K	5%	1/4W	
R028	1-246-505-00	CARBON	22K	5%	1/4W	
R029	1-246-521-00	CARBON	100K	5%	1/4W	
R031	1-246-505-00	CARBON	22K	5%	1/4W	
R032	1-246-505-00	CARBON	22K	5%	1/4W	
R033	1-246-495-00	CARBON	8.2K	5%	1/4W	
R034	1-246-461-00	CARBON	330	5%	1/4W	
R035	1-246-521-00	CARBON	100K	5%	1/4W	
R037	1-246-485-00	CARBON	3.3K	5%	1/4W	
R039	1-246-485-00	CARBON	3.3K	5%	1/4W	
R040	1-246-513-00	CARBON	47K	5%	1/4W	
R041	1-246-505-00	CARBON	22K	5%	1/4W	
R044	1-246-505-00	CARBON	22K	5%	1/4W	
R046	1-246-481-00	CARBON	2.2K	5%	1/4W	
R047	1-246-505-00	CARBON	22K	5%	1/4W	
R048	1-246-485-00	CARBON	3.3K	5%	1/4W	
R049	1-246-489-00	CARBON	4.7K	5%	1/4W	
R050	1-246-489-00	CARBON	4.7K	5%	1/4W	
R051	1-246-521-00	CARBON	100K	5%	1/4W	
R052	1-246-497-00	CARBON	10K	5%	1/4W	
R053	1-246-497-00	CARBON	10K	5%	1/4W	
R054	1-246-523-00	CARBON	120K	5%	1/4W	
R055	1-246-501-00	CARBON	15K	5%	1/4W	
R056	1-246-473-00	CARBON	1K	5%	1/4W	
R057	1-246-535-00	CARBON	390K	5%	1/4W	
R058	1-246-473-00	CARBON	1K	5%	1/4W	
R059	1-246-513-00	CARBON	47K	5%	1/4W	
R061	1-246-475-00	CARBON	1.2K	5%	1/4W	
R063	1-246-481-00	CARBON	2.2K	5%	1/4W	
R064	1-246-497-00	CARBON	10K	5%	1/4W	
R065	1-246-513-00	CARBON	47K	5%	1/4W	
R066	1-246-497-00	CARBON	10K	5%	1/4W	
R067	1-246-475-00	CARBON	1.2K	5%	1/4W	
R070	1-246-469-00	CARBON	680	5%	1/4W	
R071	1-246-545-00	CARBON	1M	5%	1/4W	
R072	1-246-545-00	CARBON	1M	5%	1/4W	
R073	1-246-473-00	CARBON	1K	5%	1/4W	
R074	1-246-473-00	CARBON	1K	5%	1/4W	
R075	1-246-449-00	CARBON	100	5%	1/4W	
R076	1-246-469-00	CARBON	680	5%	1/4W	
R077	1-246-513-00	CARBON	47K	5%	1/4W	
R078	1-202-723-00	COMPOSITION	2.2M	10%	1/2W	
R079	1-202-735-00	COMPOSITION	22M	10%	1/2W	
R080	1-246-473-00	CARBON	1K	5%	1/4W	
R081	1-246-509-00	CARBON	33K	5%	1/4W	
R082	1-246-513-00	CARBON	47K	5%	1/4W	
R083	1-246-473-00	CARBON	1K	5%	1/4W	
R084	1-246-513-00	CARBON	47K	5%	1/4W	
R085	1-246-513-00	CARBON	47K	5%	1/4W	
R086	1-246-473-00	CARBON	1K	5%	1/4W	
R087	1-246-473-00	CARBON	1K	5%	1/4W	

No.	Part No	Description				Remark
R088	1-246-473-00	CARBON	1K	5%	1/4W	
R089	1-246-473-00	CARBON	1K	5%	1/4W	
R090	1-246-521-00	CARBON	100K	5%	1/4W	
R091	1-246-513-00	CARBON	47K	5%	1/4W	
R092	1-246-521-00	CARBON	100K	5%	1/4W	
R093	1-246-537-00	CARBON	470K	5%	1/4W	
R094	1-246-465-00	CARBON	470		1/4W	
R095	1-246-521-00	CARBON	100K	5%	1/4W	
R096	1-202-463-00	COMPOSITION	2.2M	1	1/4W	

****

♣:A-1330-351-A C BOARD, COMPLETE
****

♣:1-606-471-00 PC BOARD, C
1-526-086-XX SOCKET, PICTURE TUBE
♣:1-555-946-61 CONNECTOR ASSY, MINIATURE 5P
♣:1-555-340-00 CONNECTOR ASSY (2.5MM) 5P

CONNECTOR

C1	1-508-765-00	3P PLUG (M)

CAPACITOR

C701	1-161-313-00	CERAMIC	150PF	10%	50V
C702	1-161-313-00	CERAMIC	150PF	10%	50V
C703	1-161-317-00	CERAMIC	330PF	10%	50V
C704	1-129-718-00	FILM	0.022MF	10%	630V
C705	1-108-433-00	MYLAR	0.1MF	10%	200V
C706	1-102-030-00	CERAMIC	330PF	10%	500V
C715	1-102-155-00	CERAMIC	330PF	20%	2KV

COIL

L701	1-407-710-00	MICRO INDUCTOR 270UH
L702	1-407-841-00	COIL 15UH

NEON LAMP

NL701	1-519-108-XX	LAMP, NEON ASSY

TRANSISTOR

Q701	8-729-322-78	TRANSISTOR 2SC2278
Q702	8-729-322-78	TRANSISTOR 2SC2278
Q703	8-729-322-78	TRANSISTOR 2SC2278

RESISTOR

R701	1-246-457-00	CARBON	220	5%	1/4W	
R702	1-246-457-00	CARBON	220	5%	1/4W	
R703	1-246-457-00	CARBON	220	5%	1/4W	
R704	1-246-461-00	CARBON	330	5%	1/4W	
R705	1-246-459-00	CARBON	270	5%	1/4W	
R706	1-246-461-00	CARBON	330	5%	1/4W	
R707	1-246-485-00	CARBON	3.3K	5%	1/4W	
R708	1-246-485-00	CARBON	3.3K	5%	1/4W	
R709	1-246-485-00	CARBON	3.3K	5%	1/4W	

No.	Part No	Description				Remark
R710	1-206-692-00	METAL	15K	5%	2W	F
R711	1-206-692-00	METAL	15K	5%	2W	F
R712	1-206-692-00	METAL	15K	5%	2W	F
R713	1-202-824-00	COMPOSITION	3.3K		1/2W	
R714	1-202-824-00	COMPOSITION	3.3K		1/2W	
R715	1-202-824-00	COMPOSITION	3.3K		1/2W	
R716	1-202-549-00	COMPOSITION	100	10%	1/2W	
R717	1-202-719-00	COMPOSITION	1M	10%	1/2W	
R718	1-202-845-51	COMPOSITION	390K		1/2W	
R719	1-202-837-00	COMPOSITION	82K		1/2W	
R720	1-202-844-00	COMPOSITION	330K		1/2W	
R721	1-202-847-00	COMPOSITION	560K		1/2W	
R722	1-202-719-00	COMPOSITION	1M	10%	1/2W	

VARIABLE RESISTOR

RV701	1-226-850-00	RES, ADJ, CARBON 4.7K
RV702	1-226-850-00	RES, ADJ, CARBON 4.7K
RV703	1-226-850-00	RES, ADJ, CARBON 4.7K
RV704	1-228-577-00	RES, ADJ, CARBON 220
RV705	1-228-577-00	RES, ADJ, CARBON 220
RV706	1-226-114-00	RES, ADJ, METAL GLAZE 2.2M
RV707	1-226-157-00	RES, ADJ, METAL GLAZE 1M

SPARK GAP

SG701	1-519-063-XX	DISCHARGING GAP
SG702	1-519-063-XX	DISCHARGING GAP
SG703	1-519-063-XX	DISCHARGING GAP
SG704	1-519-063-XX	DISCHARGING GAP
SG705	1-519-063-XX	DISCHARGING GAP

****

♣:A-1345-380-A D BOARD, COMPLETE
****

♣:4-314-938-01 RETAINER (TO-3), TRANSISTOR
♣:4-329-407-00 LUG, GROUND

CAPACITOR

C501	1-123-333-00	ELECT	100MF	20%	16V
C502	1-108-385-00	MYLAR	0.047MF	10%	100V
C503	1-123-361-00	ELECT	220MF	20%	50V
C504	1-123-333-00	ELECT	100MF	20%	25V
C505	1-108-377-00	MYLAR	0.01MF	10%	100V
C506	1-108-385-00	MYLAR	0.047MF	10%	100V
C507	1-123-380-00	ELECT	1MF	20%	50V
C508	1-123-380-00	ELECT	1MF	20%	50V
C509	1-123-380-00	ELECT	1MF	20%	50V
C510	1-108-373-00	MYLAR	0.0047MF	10%	100V
C511	1-130-024-00	FILM	0.0033MF	5%	50V
C512	1-108-563-00	MYLAR	0.0022MF	5%	50V
C513	1-108-591-00	MYLAR	0.033MF	5%	50V
C514	1-108-591-00	MYLAR	0.033MF	5%	50V
C515	1-123-357-00	ELECT	22MF	20%	50V

D

No.	Part No	Description			Remark
C516	1-102-030-00	CERAMIC	330PF	10%	500V
C517	1-102-038-00	CERAMIC	0.001MF		500V
C518	1-123-269-00	ELECT	4.7MF	20%	160V
C519	1-108-425-00	MYLAR	0.022MF	10%	200V
C520	1-108-434-00	MYLAR	0.12MF	10%	200V
C521	1-123-379-00	ELECT	0.47MF	20%	50V
C522	1-123-363-00	ELECT	470MF	20%	50V
C523	1-108-389-00	MYLAR	0.1MF	10%	100V
C524	1-123-379-00	ELECT	0.47MF	20%	50V
C525	1-131-448-00	TANTALUM	1MF	5%	35V
C526	1-102-244-00	CERAMIC	220PF	10%	500V
C527	1-108-383-00	MYLAR	0.033MF	10%	100V
C528	1-129-708-00	FILM	0.0033MF	10%	630V
C529	1-123-333-00	ELECT	100MF	20%	16V
C531	1-108-433-00	MYLAR	0.1MF	10%	200V
C532	1-102-244-00	CERAMIC	220PF	10%	500V
C533	1-108-365-00	MYLAR	0.001MF	10%	100V
C534	1-131-448-00	TANTALUM	1MF	5%	35V
C535	1-102-989-00	CERAMIC	68PF	5%	500V
C536	1-108-421-00	MYLAR	0.01MF	10%	200V
C550	1-123-379-00	ELECT	0.47MF	20%	50V
C551	1-123-345-00	ELECT	100MF	20%	35V
C552	1-123-382-00	ELECT	3.3MF	20%	50V
C553	1-108-381-00	MYLAR	0.022MF	10%	100V
C554	1-123-356-00	ELECT	10MF	20%	16V
C555	1-123-330-00	ELECT	22MF	20%	25V
C556	1-123-382-00	ELECT	3.3MF	20%	50V
C557	1-108-375-00	MYLAR	0.0068MF	10%	100V
C558	1-108-637-00	MYLAR	0.082MF	10%	100V
C559	1-108-382-00	MYLAR	0.027MF	10%	100V
C561	1-108-377-00	MYLAR	0.01MF	10%	100V
C562	1-108-381-00	MYLAR	0.022MF	10%	100V
C563	1-108-377-00	MYLAR	0.01MF	10%	100V
C564	1-108-377-00	MYLAR	0.01MF	10%	100V
C565	1-123-333-00	ELECT	100MF	20%	25V
C569	1-106-188-00	MYLAR	0.0047MF	5%	100V
C570	1-129-701-00	FILM	0.01MF	5%	100V
C571	1-123-357-00	ELECT	22MF	20%	50V
C574	1-123-332-00	ELECT	47MF	20%	25V
C575	1-123-380-00	ELECT	1MF	20%	50V
C578	1-123-380-00	ELECT	1MF	20%	50V
C590	1-123-380-00	ELECT	1MF	20%	50V
C803	1-108-427-00	MYLAR	0.033MF	10%	200V
C804	1-123-263-00	ELECT	33MF	20%	250V
C805	1-102-228-00	CERAMIC	470PF	10%	500V
C806	1-101-810-00	CERAMIC	100PF	5%	500V
C807	1-123-322-00	ELECT	330MF	20%	16V
C808	1-123-333-00	ELECT	100MF	20%	16V
C809	1-123-333-00	ELECT	100MF	20%	16V
C810	1-130-222-00	FILM	0.017MF	3%	1.2KV
C811	1-129-722-00	FILM	0.047MF	10%	630V
C813	1-129-704-00	FILM	0.0015MF	10%	630V
C814	1-130-547-00	FILM	1.5MF	5%	200V

No.	Part No	Description			Remark
C815	1-108-377-00	MYLAR	0.01MF	10%	100V
C816	1-130-657-00	FILM	1MF	5%	200V
C817	1-102-154-00	CERAMIC	180PF	20%	2KV
C818	1-123-005-00	ELECT	22MF		250V
C819	1-108-425-00	MYLAR	0.022MF	10%	200V
C820	1-130-228-00	FILM	0.011MF	3%	1.2KV
C821	1-161-754-00	CERAMIC	0.001MF	10%	3KV
C822	1-108-421-00	MYLAR	0.01MF	10%	200V
C823	1-108-377-00	MYLAR	0.01MF	10%	100V
C826	1-161-959-00	CERAMIC	22PF	10%	500V
C827	1-130-162-00	FILM	0.33MF	5%	200V
C851	1-108-433-00	MYLAR	0.1MF	10%	200V
C852	1-102-030-00	CERAMIC	330PF	10%	500V
C853	1-123-362-00	ELECT	330MF	20%	50V
C854	1-102-030-00	CERAMIC	330PF	10%	500V
C855	1-123-334-00	ELECT	220MF	20%	25V
C856	1-123-308-00	ELECT	220MF	20%	10V
C857	1-123-356-00	ELECT	10MF	20%	50V
C858	1-102-038-00	CERAMIC	0.001MF		500V
C859	1-102-228-00	CERAMIC	470PF	10%	500V

CONNECTOR

D1	♣:1-508-766-00	4P PLUG (M)	
D2	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
D3	♣:1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P	
D5	♣:1-508-768-00	6P PLUG	
D6	♣:1-508-767-00	5P PLUG	
D7	♣:1-508-766-00	4P PLUG (M)	
D8	♣:1-508-786-00	2P PLUG (M)	
D11	1-508-765-00	3P PLUG (M)	
D12	♣:1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)	
D13	1-508-765-00	3P PLUG (M)	
D14	♣:1-508-784-00	1P PLUG	

DIODE

D501	⇒8-719-100-68	DIODE RD13E-B2	
D502	⇒8-719-911-19	DIODE 1SS119	
D503	⇒8-719-924-06	DIODE ERC24-06S	
D504	⇒8-719-924-06	DIODE ERC24-06S	
D505	⇒8-719-911-19	DIODE 1SS119	
D506	⇒8-719-924-06	DIODE ERC24-06S	
D551	⇒8-719-911-19	DIODE 1SS119	
D552	⇒8-719-911-19	DIODE 1SS119	
D553	⇒8-719-911-19	DIODE 1SS119	
D801	⇒8-719-305-15	DIODE GH3F	
D802	⇒8-719-305-15	DIODE GH3F	
D803	8-719-900-26	DIODE ERD29-08J	
D804	⇒8-719-924-06	DIODE ERC24-06S	
D805	⇒8-719-924-06	DIODE ERC24-06S	
D806	⇒8-719-924-06	DIODE ERC24-06S	
D808	⇒8-719-305-15	DIODE GH3F	
D809	⇒8-719-305-15	DIODE GH3F	
D851	8-719-924-06	DIODE ERC24-06S	

No.	Part No	Description	Remark
D852	⇒8-719-924-06	DIODE ERC24-06S	
D853	⇒8-719-924-06	DIODE ERC24-06S	
D854	⇒8-719-920-04	DIODE ERB12-04RK	
D855	8-719-903-09	DIODE V30N	
D856	8-719-931-05	DIODE EQB01-05	
D857	⇒8-719-924-06	DIODE ERC24-06S	

CONNECTOR

DY1	1-508-765-00	3P PLUG (M)
DY2	1-508-765-00	3P PLUG (M)

IC

IC501	8-759-800-11	IC LA7801
IC551	8-759-905-39	IC TDA1082

COIL

L501	1-459-105-21	COIL(WITH CORE) 2.7MMH
L502	1-459-314-00	COIL, VARIABLE; PAC
L503	1-407-717-00	MICRO INDUCTOR 1MMH
L551	1-407-509-00	MICRO INDUCTOR 27MMH
L552	1-407-509-00	MICRO INDUCTOR 27MMH
L553	1-408-242-00	MICRO INDUCTOR 10MMH
L554	1-408-247-00	MICRO INDUCTOR 33MMH
L801	1-459-215-00	CORE COIL 120UH
L804	1-407-703-00	MICRO INDUCTOR 68UH
L806	1-407-365-00	COIL, CHOKE 0.74UH
L807	1-408-300-00	MICRO INDUCTOR 6.8UH
L809	1-459-111-00	COIL, DRAM CORE (CDI) 10MMH
L810	1-408-225-00	MICRO INDUCTOR 3.3UH
L811	1-459-125-00	COIL, HORIZONTAL LINEARITY
L812	1-459-263-21	COIL, MODULATION
L815	1-408-241-00	MICRO INDUCTOR 8.2MMH
L816	1-408-225-00	MICRO INDUCTOR 3.3UH
L851	1-407-710-00	MICRO INDUCTOR 270UH

TRANSISTOR

Q501	⇒8-729-177-43	TRANSISTOR 2SD774
Q502	8-729-195-82	TRANSISTOR 2SC2958
Q503	8-729-122-02	TRANSISTOR 2SA1220A
	♣:4-342-076-00	HEAT SINK, V.OUT, Q503
Q504	8-729-169-02	TRANSISTOR 2SC2690A
	♣:4-342-076-00	HEAT SINK, V.OUT, Q504
Q505	8-729-103-43	TRANSISTOR 2SB734
Q506	8-729-177-43	TRANSISTOR 2SD774
Q551	8-729-374-02	TRANSISTOR 2SB740
Q552	8-729-195-82	TRANSISTOR 2SC2958
Q571	8-729-178-54	TRANSISTOR 2SC2785
Q590	8-729-117-54	TRANSISTOR 2SA1175
Q801	8-729-168-82	TRANSISTOR 2SC2688
Q802	8-726-420-00	THYRISTOR SG-264A
	2-325-006-00	SPACER, MICA, Q802
	3-701-609-00	BUSHING (B), TR, Q802

No.	Part No	Description	Remark
	♣:4-309-762-00	RETAINER (MD-17), TRANSISTOR, Q802	
Q803	8-729-372-53	TRANSISTOR 2SD725-04	
	3-701-353-00	SPACER, MICA, Q803	
	3-701-609-00	BUSHING (B), TR, Q803	
Q805	8-729-177-43	TRANSISTOR 2SD774	
Q806	8-729-103-43	TRANSISTOR 2SB734	
Q807	8-729-178-54	TRANSISTOR 2SC2785	

RESISTOR

R501	1-246-517-00	CARBON	68K	5% 1/4W	
R502	1-206-757-00	METAL	22K	5% 3W	F
R503	1-246-461-00	CARBON	330	5% 1/4W	
R504	1-246-487-00	CARBON	3.9K	5% 1/4W	
R505	1-246-467-00	CARBON	560	5% 1/4W	
R506	1-246-487-00	CARBON	3.9K	5% 1/4W	
R507	1-246-506-00	CARBON	24K	5% 1/4W	
R508	1-246-461-00	CARBON	330	5% 1/4W	
R509	1-246-521-00	CARBON	100K	5% 1/4W	
R510	1-246-473-00	CARBON	1K	5% 1/4W	
R511	1-246-499-00	CARBON	12K	5% 1/4W	
R512	1-246-503-00	CARBON	18K	5% 1/4W	
R513	1-246-513-00	CARBON	47K	5% 1/4W	
R514	1-246-473-00	CARBON	1K	5% 1/4W	
R515	1-246-475-00	CARBON	1.2K	5% 1/4W	
R516	1-246-519-00	CARBON	82K	5% 1/4W	
R517	1-246-507-00	CARBON	27K	5% 1/4W	
R518	1-246-519-00	CARBON	82K	5% 1/4W	
R519	1-246-523-00	CARBON	120K	5% 1/4W	
R520	1-211-409-00	CARBON	10	5% 1/4W	F
R521	1-244-849-00	CARBON	100	5% 1/2W	
R522	1-211-930-00	CARBON	33	5% 1/8W	F
R523	1-213-144-00	METAL	1.2K	5% 1W	F
R524	1-247-003-00	CARBON	39	5% 1/4W	F
R525	1-246-503-00	CARBON	18K	5% 1/4W	
R526	1-212-361-00	METAL	1.2	5% 1W	F
R527	1-212-361-00	METAL	1.2	5% 1W	F
R528	1-244-869-00	CARBON	680	5% 1/2W	
R529	1-246-497-00	CARBON	10K	5% 1/4W	
R531	1-246-499-00	CARBON	12K	5% 1/4W	
R532	1-246-523-00	CARBON	120K	5% 1/4W	
R533	1-212-365-00	METAL	2.7	5% 1W	F
R534	1-246-463-00	CARBON	390	5% 1/4W	
R535	1-246-505-00	CARBON	22K	5% 1/4W	
R536	1-246-509-00	CARBON	33K	5% 1/4W	
R537	1-246-481-00	CARBON	2.2K	5% 1/4W	
R538	1-246-497-00	CARBON	10K	5% 1/4W	
R539	1-213-139-00	METAL	470	5% 1W	F
R540	1-246-487-00	CARBON	3.9K	5% 1/4W	
R541	1-246-489-00	CARBON	4.7K	5% 1/4W	
R542	1-213-143-00	METAL	1K	5% 1W	F
R543	1-206-640-00	METAL	100	5% 2W	F
R544	1-246-501-00	CARBON	15K	5% 1/4W	
R545	1-244-895-00	CARBON	8.2K	5% 1/2W	

No.	Part No	Description				Remark
R546	1-246-515-00	CARBON	56K	5%	1/4W	
R548	1-246-497-00	CARBON	10K	5%	1/4W	
R550	1-213-135-00	METAL	220	5%	1W	F
R551	1-246-429-00	CARBON	15	5%	1/4W	
R552	1-246-497-00	CARBON	10K	5%	1/4W	
R553	1-206-642-00	METAL	120	5%	2W	F
R554	1-246-507-00	CARBON	27K	5%	1/4W	
R555	1-246-497-00	CARBON	10K	5%	1/4W	
R556	1-213-124-00	METAL	27	5%	1W	F
R557	1-244-875-00	CARBON	1.2K	5%	1/2W	
R558	1-246-467-00	CARBON	560	5%	1/4W	
R559	1-246-461-00	CARBON	330	5%	1/4W	
R560	1-246-451-00	CARBON	120	5%	1/4W	
R561	1-246-529-00	CARBON	220K	5%	1/4W	
R562	1-246-455-00	CARBON	180	5%	1/4W	
R563	1-246-487-00	CARBON	3.9K	5%	1/4W	
R564	1-246-503-00	CARBON	18K	5%	1/4W	
R565	1-246-503-00	CARBON	18K	5%	1/4W	
R566	1-246-484-00	CARBON	3K	5%	1/4W	
R567	1-246-519-00	CARBON	82K	5%	1/4W	
R568	1-246-503-00	CARBON	18K	5%	1/4W	
R569	1-246-515-00	CARBON	56K	5%	1/4W	
R570	1-246-533-00	CARBON	330K	5%	1/4W	
R571	1-246-493-00	CARBON	6.8K	5%	1/4W	
R572	1-246-495-00	CARBON	8.2K	5%	1/4W	
R573	1-246-473-00	CARBON	1K	5%	1/4W	
R574	1-246-457-00	CARBON	220	5%	1/4W	
R575	1-246-511-00	CARBON	39K	5%	1/4W	
R576	1-246-507-00	CARBON	27K	5%	1/4W	
R577	1-246-473-00	CARBON	1K	5%	1/4W	
R578	1-246-473-00	CARBON	1K	5%	1/4W	
R579	1-246-521-00	CARBON	100K	5%	1/4W	
R581	1-210-825-00	COMPOSITION	3.3M	5%	1/4W	
R582	1-246-489-00	CARBON	4.7K	5%	1/4W	
R584	1-211-614-00	CARBON	100	5%	1/2W	F
R590	1-246-479-00	CARBON	1.8K	5%	1/4W	
R591	1-246-505-00	CARBON	22K	5%	1/4W	
R592	1-246-461-00	CARBON	330	5%	1/4W	
R593	1-246-467-00	CARBON	560	5%	1/4W	
R594	1-246-503-00	CARBON	18K	5%	1/4W	
R801	1-246-461-00	CARBON	330	5%	1/4W	
R802	1-246-489-00	CARBON	4.7K	5%	1/4W	
R803	1-206-741-00	METAL	4.7K	5%	3W	F
R804	1-206-741-00	METAL	4.7K	5%	3W	F
R806	1-246-521-00	CARBON	100K	5%	1/4W	
R807	1-244-923-00	CARBON	120K	5%	1/2W	
R808	1-212-849-00	FUSIBLE	4.7	5%	1/4W	F
R809	1-246-979-00	CARBON	1.2	5%	1/8W	F
R810	1-212-849-00	FUSIBLE	4.7	5%	1/4W	F
R811	1-246-445-00	CARBON	68	5%	1/4W	
R812	1-206-463-00	METAL	10	5%	2W	F
R813	1-206-658-00	METAL	560	5%	2W	F
R814	1-202-719-00	COMPOSITION	1M	10%	1/2W	

No.	Part No	Description				Remark
R815	1-213-147-00	METAL	2.2K	5%	1W	F
R816	1-206-463-00	METAL	10	5%	2W	F
R818	1-246-497-00	CARBON	10K	5%	1/4W	
R820	1-246-509-00	CARBON	33K	5%	1/4W	
R821	1-246-487-00	CARBON	3.9K	5%	1/4W	
R822	1-213-131-00	METAL	100	5%	1W	F
R823	1-246-481-00	CARBON	2.2K	5%	1/4W	
R851	1-246-997-00	CARBON	1.2	5%	1/4W	F
R852	1-247-290-00	CARBON	1.2	5%	1/2W	F
R853	1-207-473-00	WIREWOUND	6.8	10%	1/2W	
R855	1-202-830-00	COMPOSITION	10K		1/2W	
R856	1-244-889-00	CARBON	4.7K	5%	1/2W	
R857	1-202-838-00	COMPOSITION	100K		1/2W	

VARIABLE RESISTOR

RV501	1-224-251-XX	RES, ADJ, METAL GLAZE 4.7K	
RV502	1-226-851-00	RES, ADJ, CARBON 10K	
RV503	1-226-846-00	RES, ADJ, CARBON 470	
RV551	1-226-851-00	RES, ADJ, CARBON 10K	
RV552	1-226-850-00	RES, ADJ, CARBON 4.7K	
RV553	1-226-846-00	RES, ADJ, CARBON 470	
RV555	1-226-845-00	RES, ADJ, CARBON 330	
RV556	1-226-848-00	RES, ADJ, CARBON 2.2K	
RV557	1-226-851-00	RES, ADJ, CARBON 10K	
RV571	1-226-854-00	RES, ADJ, CARBON 100K	
RV801	1-226-847-00	RES, ADJ, CARBON 1K	

SPARK GAP

SG801	1-519-063-XX	DISCHARGING GAP

TRANSFORMER

T501	1-421-245-11	TRANSFOMER, PIN CUSHION
T801	1-437-079-00	TRANSFORMER, HPRIZONTAL DRIVE
T802 ⚠	**1-439-286-00**	**TRANSFORMER ASSY, FLYBACK**
T803	1-421-354-00	TRANSFORMER, FERRITE (P.H.T)

THERMISTOR

TH501	1-800-199-00	THERMISTOR
TH551	1-806-110-00	THERMISTOR
TH590	1-800-944-00	THERMISTOR TH-4700

****

♦:1-606-473-00	H1 BOARD	
	********	
♦:1-555-958-51	CONNECTOR ASSY (2.5MM) 2P	
♦:1-555-965-81	CONNECTOR ASSY (2.5MM) 5P	
♦:1-556-002-81	CONNECTOR ASSY (2.5MM) 6P	
♦:1-556-002-91	CONNECTOR ASSY (2.5MM) 6P	
♦:4-356-317-00	HOLDER (A), LED	

DIODE

D405	=>8-719-911-19	DIODE ISS119

No.	Part No	Description	Remark
LED401	8-719-812-41	DIODE TLR1Z4	
LED402	8-719-812-42	DIODE TLY124	
LED403	8-719-812-43	DIODE TLG124	
LED404	8-719-812-41	DIODE TLR124	

CONNECTOR

M14	♦:1-551-833-00	CONNECTOR ASSY 4P
M20	♦:1-551-937-00	CONNECTOR ASSY 5P

RESISTOR

R401	1-246-535-00	CARBON	390K	5%	1/4W
R402	1-246-487-00	CARBON	3.9K	5%	1/4W
R404	1-246-521-00	CARBON	100K	5%	1/4W
R405	1-246-513-00	CARBON	47K	5%	1/4W
R406	1-246-481-00	CARBON	2.2K	5%	1/4W
R407	1-246-491-00	CARBON	5.6K	5%	1/4W

VARIABLE RESISTOR

RV401	1-228-578-00	RES, VAR, CARBON 10K
RV402	1-228-578-00	RES, VAR, CARBON 10K
RV403	1-228-578-00	RES, VAR, CARBON 10K
RV405	1-228-578-00	RES, VAR, CARBON 10K
RV406	1-228-578-00	RES, VAR, CARBON 10K
RV407	1-228-578-00	RES, VAR, CARBON 10K

SWITCH

S401	1-552-774-00	SWITCH, PUSH
S402	1-552-774-00	SWITCH, PUSH
S403	1-552-774-00	SWITCH, PUSH
S404	1-552-774-00	SWITCH, PUSH
S405	1-552-774-00	SWITCH, PUSH
S406	1-552-774-00	SWITCH, PUSH
S407	1-552-774-00	SWITCH, PUSH
S408	1-552-774-00	SWITCH, PUSH
S409	1-552-774-00	SWITCH, PUSH
S410	1-552-774-00	SWITCH, PUSH
S411	1-552-774-00	SWITCH, PUSH
S412	1-552-737-00	SWITCH, PUSH

****

♦:1-606-474-00	H2 BOARD	
	********	
♦:4-356-318-00	HOLDER (B), LED	

CAPACITOR

C450	1-123-818-00	ELECT	22MF	20%	25V

DIODE

D451	=>8-719-911-19	DIODE ISS119

No.	Part No	Description	Remark
		CONNECTOR	
H1	♦:1-560-278-00	PLUG, CONNECTOR 12P	
		IC	
IC451	8-759-600-18	IC M54847P	
		DIODE	
LED450	8-719-803-20	DIODE TLR320	
LED451	8-719-801-07	DIODE TLR107	
LED452	8-719-812-41	DIODE TLR124	
LED453	8-719-812-41	DIODE TLR124	
		CONNECTOR	
M18	♦:1-551-673-00	CONNECTOR ASSY 3P	
		RESISTOR	
R452	1-246-493-00	CARBON 6.8K 5% 1/4W	

****

♦:1-606-475-00	J1 BOARD	
	********	
♦:4-356-785-00	HOLDER, SOCKET	

CAPACITOR

C951	1-123-613-00	ELECT	3.3MF	20%	50V
C952	1-123-613-00	ELECT	3.3MF	20%	50V
C953	1-123-821-00	ELECT	47MF	20%	16V
C954	1-101-006-00	CERAMIC	0.047MF		50V
C955	1-101-006-00	CERAMIC	0.047MF		50V

CONNECTOR

J1	♦:1-560-278-00	PLUG, CONNECTOR 3P
J2	♦:1-560-278-00	PLUG, CONNECTOR 5P
J3	♦:1-560-278-00	PLUG, CONNECTOR 3P
J4	♦:1-560-278-00	PLUG, CONNECTOR 3P
J5	♦:1-560-278-00	PLUG, CONNECTOR 3P
J6	♦:1-560-278-00	PLUG, CONNECTOR 3P

JACK

J951	1-561-827-00	SOCKET, DIN 8P
J952	1-526-728-00	SOCKET, SPEAKER
J953	1-526-728-00	SOCKET, SPEAKER

TRANSISTOR

Q951	8-729-178-54	TRANSISTOR 2SC2785
Q952	8-729-178-54	TRANSISTOR 2SC2785

RESISTOR

R951	1-246-537-00	CARBON	470K	5%	1/4W
R952	1-246-513-00	CARBON	47K	5%	1/4W

No.	Part No	Description				Remark
R955	1-246-489-00	CARBON	4.7K	5%	1/4W	
R956	1-246-537-00	CARBON	470K	5%	1/4W	
R957	1-246-513-00	CARBON	47K	5%	1/4W	
R960	1-246-489-00	CARBON	4.7K	5%	1/4W	
		VARIABLE RESISTOR				
RV951	1-228-540-00	RES, VAR, CARBON 10K				

****

			Remark
	♦:1-606-476-00	J2 BOARD	
		********	
		CONNECTOR	
J7	♦:1-560-278-00	PLUG, CONNECTOR 4P	
J8	♦:1-560-278-00	PLUG, CONNECTOR 3P	
		JACK	
J904	1-507-657-00	JACK	
		RESISTOR	
R961	1-244-865-00	CARBON 470 5% 1/2W	
R962	1-244-865-00	CARBON 470 5% 1/2W	

****

			Remark
	♦:1-606-794-00	N BOARD	
		*******	
	♦:4-342-117-00	CASE, SHIELD (MAIN), R	
	♦:4-342-118-00	LID, SHIELD CASE, R	
		CAPACITOR	
C1	1-123-617-00	ELECT 10MF 20% 16V	
C2	1-123-617-00	ELECT 10MF 20% 16V	
C3	1-123-617-00	ELECT 10MF 20% 16V	
C4	1-161-019-00	CERAMIC 0.033MF 10% 25V	
C5	1-108-567-00	MYLAR 0.0033MF 5% 50V	
C6	1-123-821-00	ELECT 47MF 20% 16V	
		DIODE	
D1	8-719-110-32	DIODE PH302B	
		IC	
IC1	8-759-113-73	IC UPC1373H	
		COIL	
L1	1-404-310-00	COIL 4.7MMH	

No.	Part No	Description	Remark
		MISCELLANEOUS	
		************	
	△.1-226-733-00	RES ASSY, HIGH-VOLTAGE	
	1-246-513-00	RES, CARBON 47K	
	△.1-451-175-21	DEFLECTION YOKE (SY-88Y)	
	1-452-032-00	MAGNET, DISK 10MM ϕ	
	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM ϕ	
	△.1-452-099-00	PICTURE TUBE, NECK ASSY	
	1-452-133-00	MAGNET	
	1-452-185-21	COIL ASSY, ETC	
	1-459-314-00	COIL, VARIABLE	
	♦:1-509-776-00	CONNECTOR ASSY, MINIATURE, 4P	
	♦:1-509-825-00	CONNECTOE ASSY, 6P	
	♦:1-509-849-72	1P CONNECTOR ASSY	
	♦:1-534-632-00	CABLE, PIN	
	♦:1-535-283-11	TERMINAL, EARTH	
	△.1-536-683-00	CONNECTOR, COAXIAL ANTENNA	
	△.1-551-427-11	CORD, POWER, EURO PLUG	
	♦:1-551-669-00	CONNECTOR ASSY, MINIATURE (1P)	
	♦:1-551-673-00	CONNECTOR ASSY 3P	
	♦:1-551-808-00	CONNECTOR 2P	
	♦:1-551-921-00	CONNECTOR ASSY 3P	
	♦:1-551-927-00	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-551-934-00	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-551-956-00	CONNECTOR ASSY, MINIATURE 3P	
	♦:1-555-190-00	CONNECTOR ASSY, MINIATURE 2P	
	♦:1-555-197-00	CONNECTOR ASSY (2.5MM) 4P	
	♦:1-555-438-00	CONNECTOR ASSY (LARGE) 3P	
	♦:1-555-755-00	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-555-817-00	CONNECTOR ASSY (2.5MM) 4P	
	♦:1-555-962-00	CONNECTOR ASSY (2.5MM) 5P	
	♦:1-555-966-21	CONNECTOR ASSY (2.5MM) 5P	
	♦:1-556-002-71	CONNECTOR ASSY (2.5MM) 6P	
	♦:1-556-003-21	CONNECTOR ASSY (2.5MM) 6P	
	♦:1-556-017-21	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-556-017-31	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-556-017-51	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-556-018-21	CONNECTOR ASSY (2.5MM) 3P	
	♦:1-556-025-31	CONNECTOR ASSY, MINIATURE 4P	
	♦:1-556-103-81	CONNECTOR ASSY (2.5MM) 4P	
	♦:1-556-141-61	CONNECTOR ASSY, MINIATURE 3P	
C804	1-123-263-00	CAP, ELECT 33MF	
C901	1-119-416-00	CAP, ELECT 5.6MF	
C902	1-102-085-00	CAP, CERAMIC 4700PF	
L901	△.1-426-042-21	COIL, DEGAUSSING	
L902	△.1-426-042-21	COIL, DEGAUSSING	
R904	1-207-457-00	RES, WIRE .33	
	1-207-462-00	RES, WIRE .82	
	1-207-465-00	RES, WIRE 1.50	
	1-207-469-00	RES, WIRE 3.30	

No.	Part No	Description	Remark
S901	△.1-553-225-00	SWITCH, PUSH (POWER)	
SP901	1-502-991-00	SPEAKER, CONE	
SP902	1-503-116-00	SPEAKER	
V901	△.8-737-606-05	PICTURE TUBE (570HB22)	

****

ACCESSORIES AND PACKING MATERIALS

****

Part No	Description	Remark
X-4356-912-0	CASE (UPPER) ASSY, COMMANDER	
3-701-627-00	BAG, POLYETHYLENE	
3-701-628-00	BAG, POLYETHYLENE	
4-493-628-41	MANUAL, INSTRUCTION	
4-315-031-00	BAG, POLYETHYLENE	
4-356-356-00	CUSHION (UPPER) (ASSY)	
4-356-362-00	CUSHION (LOWER) (ASSY)	
4-356-779-00	INDIVIDUAL CARTON	
6-047-001-10	HANDLE	